

## DHL46

---

### 46" Full-HD LCD Monitor



### Features

- Industrial Level DID LCD panel, suitable for 7\*24 continuous works.
- High contrast and high brightness greatly enhance the video layer, and present the details of the video.
- FHD 1920×1080 resolution, brilliant and vivid video.
- Build-in 3D COMB filter and 3D Noise Reduction
- Auto Motion-blur elimination to extend LCD lifespan
- Abundant interfaces, support video loop
- Remote control, software dual control, support remote PC centralized control
- Support Point-to-Point remote control, solve the multiple large-screen video wall control perfectly
- Intelligent brightness control, energy saving
- Using Tamper-proof metal housing, no radiation
- Professional thermal design to extend equipment lifespan
- Built-in power, low energy consumption, ultra-quiet

# DHL46


## Technical Specifications

<b>Model</b>	<b>DHL46</b>
<b>System</b>	
Diagonal	46"(16:9)
Type	S-PVA(HD)
Backlight	CCFL
Resolution	1920×1080
Dot Pitch	0.53025(H)×0.53025(V)
Luminance(Standard)	450 cd/m <sup>2</sup>
Contract	3000:1
Dynamic Contrast Ratio	N/A
Angle of view	178/178
Response Time(Grey Scale)	8ms
Gamut(CIE1931)	72%
Display Color	16.7M/8bit
Saturation	92%
<b>Video &amp; Audio</b>	
Video Input	CVBS(BNC)×2
PC Signal	VGA(D-Sub)×1
Digital Signal	DVI×1 [1080P(1920×1080), downward compatible] HDMI×1 [1080P(1920×1080), downward compatible]
Audio Input	—
Audio Output	—
Loop Out	CVBS(BNC)×2
<b>General</b>	
Power Consumption (Standard)	150W
Power Consumption (Maximum)	180W
Power Consumption (Standby)	≤1W
Power Supply	AC100-240V~(+/-10%),50/60 Hz
Control Mode	RS232 Serial control , all way loop , infrared remote control
Bezel Color	Black
Gross Weight	30.6kg
Unit Dimensions(mm)	1110.0×664.0×64.7
Active Screen area(mm)	1018.08×572.67
Package Dimensions(mm)	1115×753×310
Frame Depth (mm)	45.0
Enclosure material	Metal

## DHL46

Installation Mode (all optional)	Base*、 Wall-mounted*、 TV-Wall*、 Ceiling*
Protective Glass/ Touch Screen	Optional
Working Temperature	0°C~50°C
Working Humidity	20%~90%
Stock Temperature	-20°C~60°C
Average Lifespan	50 , 000 hours
<b>Note : *means optional fitting</b>	

### Dimensions (mm)

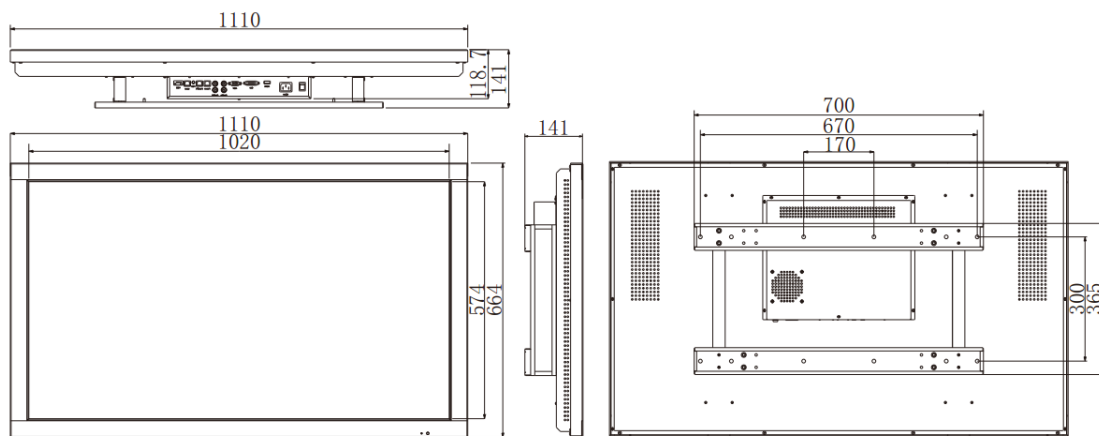

DHL46

#### Dahua Technology Co., Ltd.

1187BinAn Road, Binjiang District, Hangzhou, China

Tel: +86-571-87688883

Fax: +86-571-87688815

Email: [overseas@dahuatech.com](mailto:overseas@dahuatech.com)

[www.dahuasecurity.com](http://www.dahuasecurity.com)

\*Design and specifications are subject to change without notice.

© 2013Dahua Technology Co., Ltd.