


CODE: AWO220 v1.9/V
NAME: 17/TRP40/DSPR/S

EN

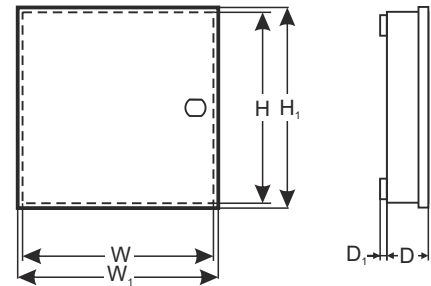

DESTINATION

DSC:

Power Series Neo

Alarm control panels: HS2016, HS2016-4, HS2032, HS2064, HS2128.

Modules: HSM2300, HSM2204, HSM2208, HSM2108, PCL-422.

Power Series

Alarm control panels: PC1832, PC1864.

Modules: PC5320, PC5100, PC5108, PC4216, PC5200, PC5204, PC5400, IT-100.

Power Series Pro

Alarm control panels: HS3032, HS3128, HS3248.

Modules: HSM3408, HSM2108, HSM3204CX, HSM3350, AMX-400.

Communication modules and transmitters: LE2080(R)/3G2080(R), TL280LE(R)/TL2803G, 3G2060(R)/TL2603G(R), LE2080(R)/TL280LE(R)E.

EBS:

Alarm control panels: PX202A.

PARADOX:

Alarm control panels: SP65, SP4000, SP5500, SP6000, SP7000, EVO192.

Modules: ZX4, ZX8, ZX8SP, PGM4, HUB2.

PYRONIX:

Alarm control panels: MATRIX424, MATRIX6, MATRIX816, MATRIX832, MATRIX832+

RISCO:

Alarm control panels: RP512MS ProSYS Plus (tylko w obudowie pustej, zasilanie DC14,4V).

ROGER:

Alarm control panels: PR402, CPR32-SE.

SATEL:

Alarm control panels: Integra24, 32, 64, 64+, 128, 128+, 256+, Versa5, 10, 15, Plus, IP, Perfecta16, 32, 32LTE-T32, Micra, CA-10P, CA-6P, CA-5P, CA-4VP.
Modules: CA-64 PTSA, CA-10E, ETHM-1 Plus, ETHM-2, GSM-X, GSM-XLTE, INT-ADR, INT-AV, INT-E, INT-FI, INT-GSM, INT-KNX-2, INT-O, INT-PP, INT-R, INT-RS Plus, INT-VG, INT-VMG, MST-1, ACCO-NT, ACCO-KP-PS, ACCO-KPWG-PS.

TELMOR:

Alarm control panels: TCA-824.

Modules: TEX800.

TEXECOM:

Alarm control panels: Premier48, 88, 168, 412, 640, , 816, 832.

Documentation shows which devices can be installed in a given enclosure. It does not define how many different devices can be installed in one enclosure. Number of installed devices depends on their size and arrangement.

TECHNICAL DATA

External dimensions of enclosure:	W=320, H=304, D+D ₁ =91+8 [+/-2 mm]
External dimensions of front panel:	W ₁ =326, H ₁ =308 [+/-2 mm]
Fitting battery:	7Ah, 17Ah/12 V Sealed Lead Acid (SLA)
Weight net/gross:	3,014 / 3,284 [kg]
Transformer:	TRP 40VA/16V/18V in case of PC/ABC in class UL94-V0, IP30
Power supply:	230 V AC (-15%/+10%), 50 Hz, 200 mA (max.)
Power supply output:	U1=16 V AC or U2=18 V AC (-5%, +15%), I1=2,2 A or I2=2,0 A (max.)
Operating conditions:	Temperature: -10°C + +40°C, relative humidity 20%...90%, without condensation
Material:	sheet steel DC01, thickness: 0,7mm, protection anticorrosion, color: RAL 9003
Destination:	indoor
Tamper protection:	1 x microswitch: enclosure opening 0,5 A; 50 V DC max. NC - normally closed contacts Optionally: 1 x microswitch: detachment form wall, 0,5A; 50 V DC (required PKAZ066)
Closing:	screwed: screw x 4
Notes:	optional: lockable (MR008 or MR027), distance from wall (mounting surface) - 8mm
Declaration, warranty:	CE, 2 years from production date