


# PAGING MICROPHONE

# PM-660U


## ■ GENERAL DESCRIPTION

The paging microphone is of desk-top type and designed to be used for paging and announcements. It is furnished with an easy-to-use large talk switch and a convenient lock lever. In addition, it comes with a remote control function to activate amplifier's power or chime unit. Refer to the amplifier's instruction manual for details of the remote function and connection.

## ■ APPEARANCE

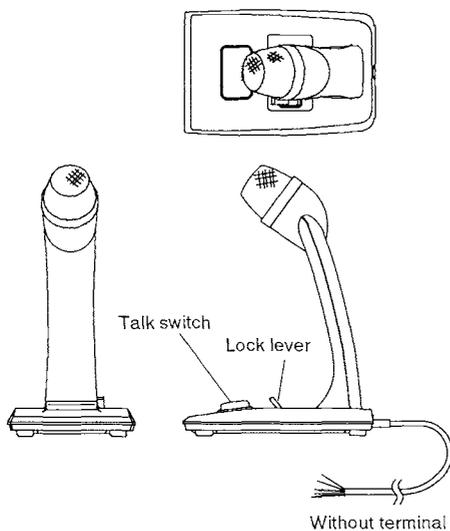

## ■ CIRCUIT DIAGRAM

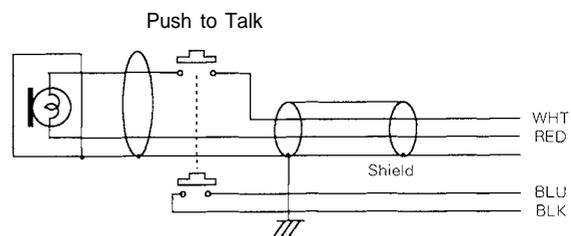

## ■ SPECIFICATIONS

Model	PM-660U
Type	Moving coil microphone
Directivity	Unidirectional
Rated Impedance	600 $\Omega$ , balanced
Rated Sensitivity	- 58 dB (1 kHz, 0 dB=1 V/Pa)
Frequency Response	100 Hz to 10 kHz
Connection Cable	2-core shielded plus 2-core cable
Cable Length	2.5 m
Terminal of Cable	None
Weight	440 g
Dimensions	100 (W) $\times$ 215 (H) $\times$ 150 (D) mm
Talk Switch	Push-to-talk type (open-off circuit, with lock lever)
Remote Switch	Leaf spring contact (interlocked with talk switch)
Finish	Head : Zinc plated steel wire, baked painting (Gray) Body : ABS resin (Gray)

\* Weight given in the above specifications does not include the connection cable.

\* Specifications are subject to change without notice.