




- ✓ Record & display up to 5 Megapixel resolution
- ✓ Easy installation with USB software license for NXU8000 series
- On-line live update for system and IP camera support upgrade
- Supports extensive IP camera brands with flexible 4CH~32CH inputs
- Supports IP camera Spot-Monitor (NX8000 series only)
- Support dual monitor output

◆ Specifications

| Product Name | NX8004/ NXU8004 | NX8008/ NXU8008 | NX8016/ NXU8016 | NX8032/ NXU8032 |
|--|---|--------------------|--------------------|--------------------|
| Interface | PCI-Express x 1 (NX8000 series) USB (NXU8000 series) | | | |
| Video Format | MJPEG, MPEG4, H.264 | | | |
| Network Video Input | 4 | 8 | 16 | 32 |
| Network Audio Input | 4 | 8 | 16 | 32 |
| Audio Output | 1 | | | |
| Video Resolution | Up to 5 MegaPixel (per channel) | | | |
| Recording Resolution | Up to 5 MegaPixel (per channel) | | | |
| Display Rate | 120 fps | 240 fps | 480 fps | 960 fps |
| Recording Rate | 120 fps | 240 fps | 480 fps | 960 fps |
| Spot-Monitor Output (NX8000 series only) | 1 configurable multi-quad TV output with auto-scan function and camera name display | | | |
| IP Camera Control | Video, Audio, IP PTZ, IO, Configuration | | | |
| Support IP camera | AXIS, Panasonic, SONY, Arecont, Mobotix, BOSCH, IQinvision, JVC, TOSHIBA, VIVOTEK, ACTi, D-Link, PiXORD, PELCO, Apron, Lilin and more | | | |
| Remote Access | CMS, Remote Console, WebViewer, PDAViewer, HandyViewer, JAVAViewer, 3GViewer, SmartViewer, iDispatch, etc. | | | |
| I/O (NX8000 series only) | RCA x 2 (Spot-Monitor x1/audio output x1) | | | |
| | Sensor input / Relay output | | | |
| | 4/4 | 4/4 | 4/4 | 4/4 |
| Dimensions | • NX8000 series: 165x 109 mm • NXU8000 series: 70(W)x33 (H)x15(D) mm | | | |

◆ System Application

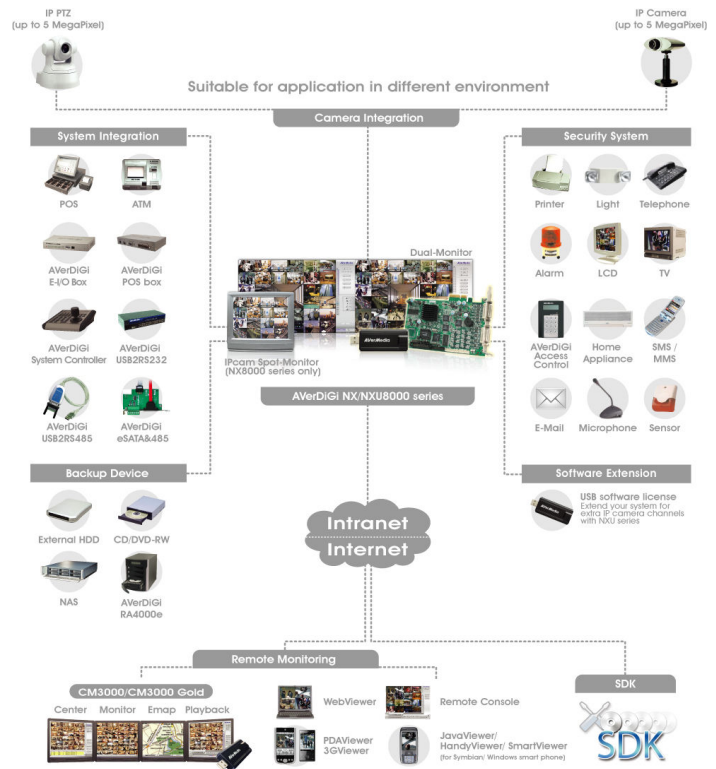

◆ System Requirements

- ✓ CPU: Pentium® 4 3.2 GHz or higher; Dual core CPU is highly recommended
- ✓ OS: Windows XP / Vista Professional
- ✓ RAM: 1G or higher
- ✓ Hard disk: 120GB or higher
- ✓ VGA: 32-bit high color SVGA graphics card with at least 64MB video memory and DirectDraw / YUV Rendering Capability
- ✓ Internet capacity : 10/100/1000MB Ethernet card
- ✓ Media : CD-RM/DVD-RM drive

**Users are allowed to plug NXU software license to NX DVR system to have extra IP cam support.



All right reserved. No part of this document may be reproduced, stored in a retrieval system, or transmitted in any form or by any means (Electronic, mechanical, photocopy, recording, or otherwise) without the written permission of AVerMedia. Information in this document is subject to change without notice. The information contained herein, is to be considered for informational purposes only and shall not be considered legally binding. 2009 by AVerMedia INFORMATION, Inc. All rights reserved. No part of this publication may be reproduced, transmitted, transcribed, stored in a retrieval system, or translated into any language in any form by any means without the written permission of AVerMedia INFORMATION, Inc. AVerMedia is registered trademarks of AVerMedia INFORMATION, Inc. All other trademarks belong to their respective companies. Made in Taiwan. 2009/1/7