


ACCTM ES 8-Port Appliance

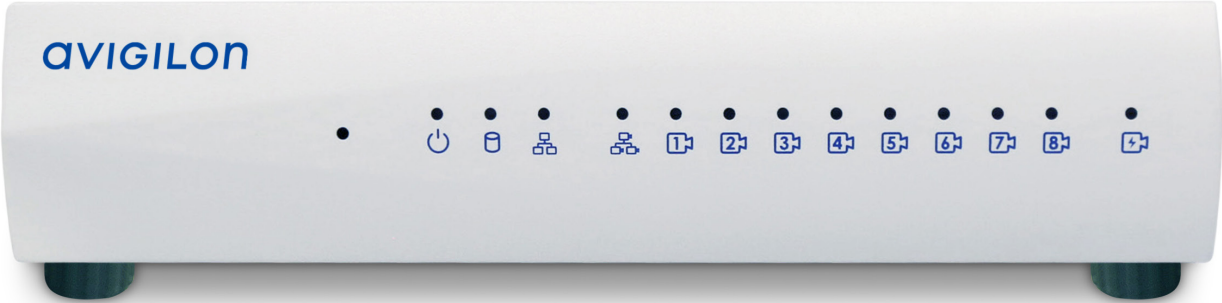


Avigilon Control CenterTM (ACC) ES 8-port (8P) Appliance is the latest innovative addition to the ACC ecosystem providing a cost effective, secure and flexible solution for smaller size deployments. With up to 8 TB of storage and a powerful on board PoE switch, the ACC ES 8P Appliance is an easy to deploy solution that can fit many needs. The ACC ES 8P Appliance features signed and encrypted Linux[®]-based firmware providing a secure and trusted platform for distributed and internet connected deployments.

KEY FEATURES

- High capacity storage with 4 and 8 TB options
- Provides up to 210 Mbps of total throughput
- Configured and pre-licensed with 8 channels of Avigilon Control Center (ACC) ENT* video management software
- Ready for mobile connections out of the box with web endpoint technology built in
- Uses Avigilon's industry leading High Definition Stream Management (HDSM)TM technology
- Remote alerts provide instant notifications to any mobile device
- Ready to deploy out of the box with secure Linux-based firmware
- Easily installed in a rack with an optional rack-mounted tray with sliding rail system

* Platform limitations apply, please consult your sales engineer.

Outline Dimensions

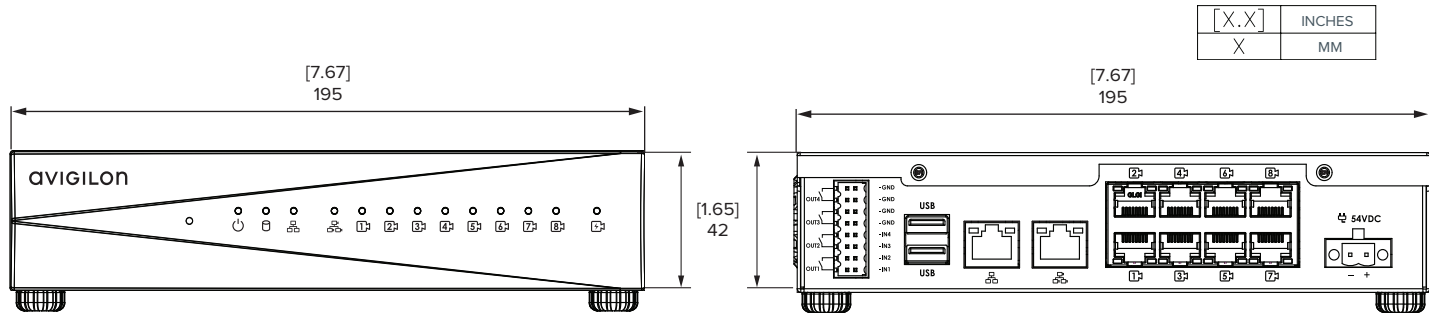

Specifications

SYSTEM	HDD Storage	1 x 3.5 inch Serial ATA hard drive (4 or 8TB)	
	Recording Rate	130 Mbps	
	Stream Out Rate	80 Mbps	
	PoE+ Ports	8 x 10/100 Mbps	
	Total PoE Budget	120 W	
	Uplink	2 x 1 GbE	
	External I/O Terminals	4 digital inputs and 4 relay outputs	
MECHANICAL	Dimensions (LxWxH)	195 x 325 x 42 mm; 7.67 x 12.79 x 1.65 in	
	Weight	2.8 kg (unit); 6.17 lbs	
ELECTRICAL	System Power Input	100-240VAC; 2.5A; 50-60Hz	
	Power Supply	Single external, 54V	
	Power Consumption	40W minimum; 180W maximum	
ENVIRONMENTAL	Operating Temperature	0° C to 40° C (32° F to 104° F)	
	Storage Temperature	-20° C to 60° C (-4° F to 140° F)	
	Humidity	0 - 90% relative humidity (non-condensing)	
CERTIFICATIONS	Certifications/Directives	UL, cUL, CE, RoHS, WEEE, RCM, NOM	
	Safety	UL 60950-1, CSA 60950-1, IEC/EN 60950-1	
	Electromagnetic Emissions	FCC Part 15 Subpart B Class B, IC ICES-003 Class B, EN 55032 Class B, EN 61000-6-3, EN 61000-3-2, EN 61000-3-3	
	Electromagnetic Immunity	EN 55024, EN 61000-6-1	
SUPPORTED ACC FEATURES	System	<ul style="list-style-type: none"> 8 cameras / device Site support for up to 24 servers, 500 cameras and 100 defined users 	<ul style="list-style-type: none"> 10 client connections / device
	Device Support	<ul style="list-style-type: none"> Automatic device discovery Avigilon HD H.264 cameras & encoders (up to 8) 	<ul style="list-style-type: none"> Avigilon HD H.264 Pro cameras ONVIF® compliant cameras & encoders
	Client	<ul style="list-style-type: none"> Saved Views Maps Web pages 	<ul style="list-style-type: none"> Editable Site View Intelligent Virtual Matrix Collaborative investigations
	Recording, Searching and Playback	<ul style="list-style-type: none"> Hourly configurable recording schedule Lossless recording Intelligent motion search Live export 	<ul style="list-style-type: none"> Thumbnail search Event search Alarm search Multi-camera export
	Integrations	All 3rd party integrations via the ACC SDK	Plus: <ul style="list-style-type: none"> CommScope iPatch® RS2 AccessIt! DDS Amadeus 5 DSX
	Additional Features	<ul style="list-style-type: none"> Email event notification Digital input email trigger Manual digital output trigger Audio recording and talkdown 	<ul style="list-style-type: none"> Unlimited rule triggers Redundant recording Failover connections Alarm escalation
	ORDERING INFORMATION	VMA-ENVR1-8P4	ACC ES 8-Port Appliance, 4TB
VMA-ENVR1-8P8		ACC ES 8-Port Appliance, 8TB	
ENC-4P-H264		4-Port H.264 Video Encoder with 4 Audio Inputs and 4 Audio Outputs	
PS-180W-ENVR1-8P		External Power Supply, ES 8P Appliance, 180W, No power cord	
RMS1U -A-ENVR1-8P		Rackmount Shelf with Sliding Rails for ES 8P Appliance	

