

< 8 \$&!JF @/!&, %&N

2.1Megapixel 1080P Vandal-proof WDR IR HDCVI Dome Camera



Features



- 1/2.7" 2.1Megapixel CMOS
- 25/30fps@1080P, 25/30/50/60fps@720P
- High speed, long distance real-time transmission
- HD and SD dual-output
- OSD Menu, control over coaxial cable
- WDR(120dB), Day/Night(ICR), AWB, AGC, BLC, 3DNR
- 2.7~12mm motorized lens
- Max. IR LEDs length 30m, Smart IR
- IP67, IK10, DC12V

Technical Specifications

Model	< 8 \$&!J F @!&, %&N
Camera	
Image Sensor	1/2.7" 2.1Megapixel CMOS
Effective Pixels	1928(H)×1088(V)
Electronic Shutter	1/3s~1/300,000s
Video Frame Rate	25/30/50/60fps@720P; 25/30fps@1080P
Synchronization	Internal
Min. Illumination	0.03Lux/F1.4, 0Lux IR on
Video Output	1-channel BNC HDCVI high definition video output & CVBS standard definition video output
Camera Features	
Max. IR LEDs Length	30m, Smart IR
Day/Night	Auto(ICR) / Color / B/W
Backlight Compensation	120dB True WDR
Noise Reduction	2D/3D
OSD Menu	Multi-language
Lens	
Focal Length	2.7~12mm
Angle of View	H: 99° ~37°
Lens Type	Motorized / Fixed Iris
Mount Type	Φ14
General	
Power Supply	DC12V±25%
Power Consumption	Max 5W
Working Environment	-30°C~+60°C / Less than 95%RH (no condensation)
Transmission Distance	Over 500m via 75-3 coaxial cable
Ingress Protection	IP67 & IK10
Dimensions	Φ122mm×89mm
Weight	0.45kg
Material	Metal

< 8 \$&!JF @!&, %&N

Dimensions (mm)

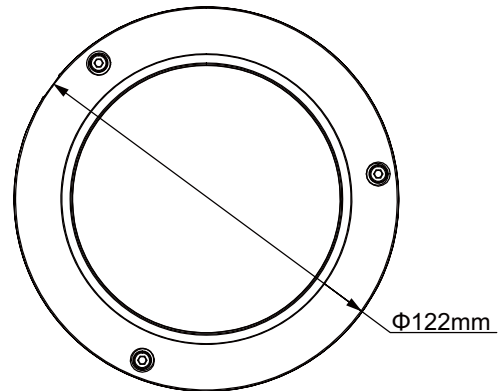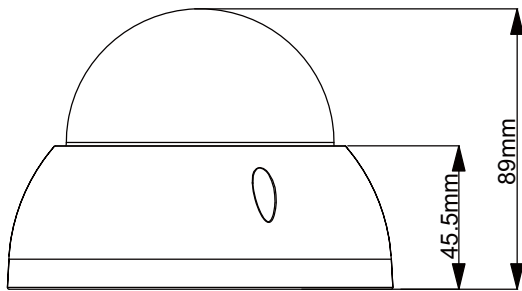

Accessories (optional)

<p>PFB203W</p>	<p>PFA137</p>	<p>PFA152</p>