




6750W

## HANDS-FREE BM MINI DOOR-ENTRY PHONE, SBTOP

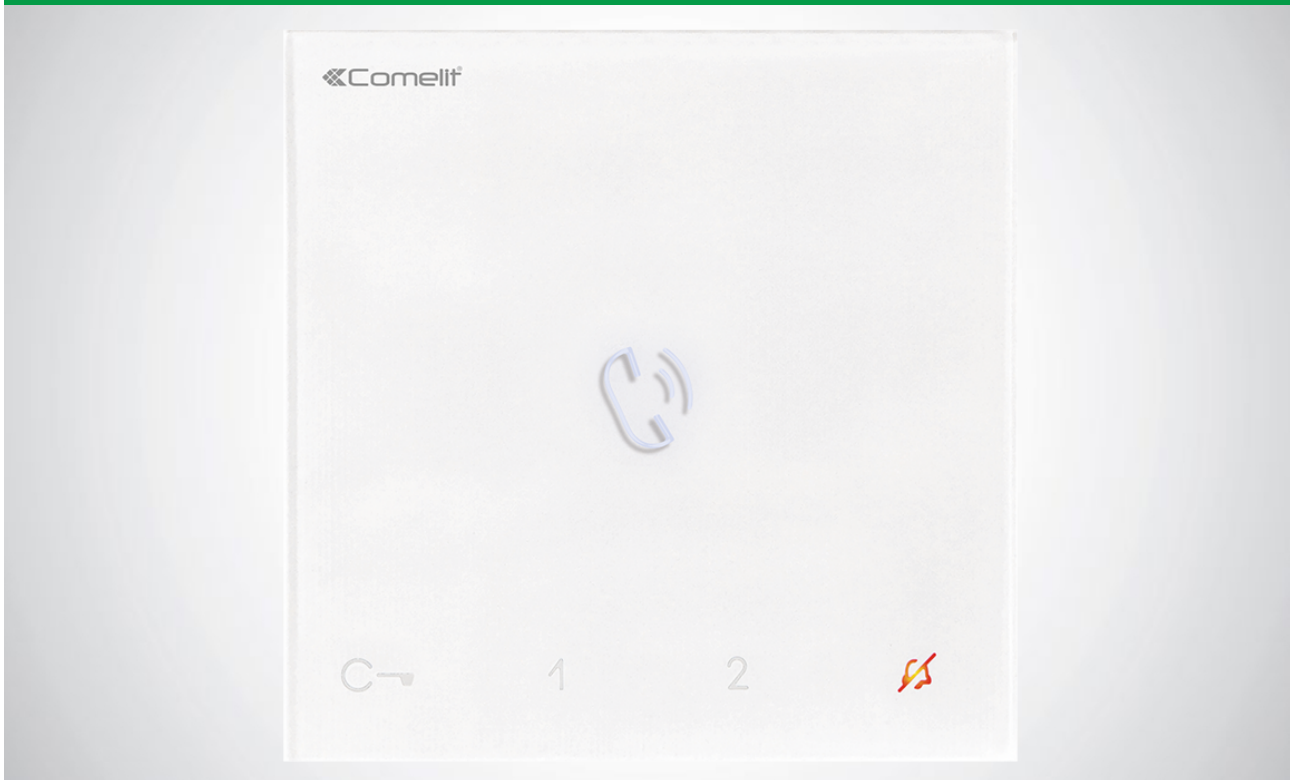

Mini series door-entry phone with full-duplex audio and integrated magnetic induction amplification system. Allows loudspeaker volume control and ringtone volume control, with choice of different melodies. Equipped with 5 touch sensitive buttons for audio key, lock-release, actuator control, switchboard call and privacy function, with door status indicator LED. Manages floor door calls as standard. Complete with 2 x 8-position dip-switches for programming user code and buttons. Wall-mounted. The door-entry phone can be used in SimplebusTop Color 2-wire systems with mixer art. 4888/C, Simplebus2 with power supply art. 1210 or kit that use the power supply art. 1209. Complete with distribution terminal art. 1214/2C. Dimensions: 4.13"x4.13"x0.79".

### AWARDS

DESIGN  
MILANO





**6750W**

**HANDS-FREE BM MINI DOOR-ENTRY PHONE, SBTOP**

**MAIN FEATURES**

Audio system:	No
Audio/video system:	Yes
Flush-mounted:	No
Wall-mounted:	Yes
Desk base-mounted:	Yes
Hands-free function:	Yes
Induction loop function:	Yes
Touch screen display:	No
Product color:	White
Sensitive Touch technology:	Yes
Total buttons:	5
LED signaling (no.):	3
Wi-Fi Port:	No
Comaptibility with Video Entry Comelit App:	No

**FUNCTIONS**

Actuator control function:	Yes
Switchboard call function:	Yes
Priority calls:	Yes
Intercom function:	Yes
Selective intercom call:	Yes
Call to multiple addresses:	Yes
Privacy function:	Yes
Doctor:	Yes
Floor door call function:	Yes
Electronic bell:	Yes
Customisable ringtone:	Yes
Key button function:	Yes

**HARDWARE SPECIFICATIONS**

Removable terminals:	Yes
Type of finish:	

**SETTINGS**

Loudspeaker volume control:	Yes
Ringtone volume control:	Yes

**GENERAL DATA**

Product height (inch):	4.13
------------------------	------



**6750W**

## **HANDS-FREE BM MINI DOOR-ENTRY PHONE, SBTOP**

### GENERAL DATA

Product width (inch):	4.13
Product depth (inch):	0.79

### COMPATIBILITY

Simplebus Top audio/video system:	Yes
Building Kit audio/video system:	Yes
Kit audio/video system:	Yes

### TECHNICAL CHARACTERISTICS

Power supply voltage:	22 ÷ 35
Absorption in stand-by (mA):	2
Absorption during communication (mA):	130
IP protection rating:	
Operating temperature (°F):	23 ÷ 104
RH max operating humidity (%):	25 ÷ 75
Product weight (oz):	0.33
Clamps:	L L CFP1 CFP2



**6750W**

## **HANDS-FREE BM MINI DOOR-ENTRY PHONE, SBTOP**

ACCESSORIES

**6754**