

## DHL22

### 22" Full-HD LCD Monitor



#### Product Features

- Industrial level DID LCD panel with LED backlight provides lifespan of 50,000hr
- 5.8 ms response time, no tail in the picture
- FHD 1920×1080 display resolution makes perfect and vivid picture
- Multiple video source input
- Using the latest 3D image digital processing circuit, clear image, wide perspective
- Black level extension self-adapting function to enhance the image depth layering
- Auto Motion-blur elimination to extend LCD lifespan
- Remote control, button, software triple control, support for remote startup or shutdown
- Support Point-to-Point remote control, solve the multiple large-screen video wall control perfectly
- Plastic shell mold design, beautiful light
- Built-in high performance power supply with low power consumption
- Support external power supply

#### Technical Specifications


<b>Model</b>	<b>DHL22</b>
<b>System</b>	
Diagonal	22"(16:9)
Type	TFT-LCD(HD)
Backlight	LED
Resolution	1920×1080
Dot Pitch	0.248(H)×0.248(V)
Luminance(Standard)	250cd/m <sup>2</sup>

## DHL22

Contrast	1000:1
Angle of view	178°/178° (vertical / horizontal)
Response Time(Grey Scale)	5.8ms
Display Color	16.7M/8bit
Saturation	92%
<b>Video &amp; Audio Interafce</b>	
Video Input	CVBS(BNC)×2
	S-videox1
Video Output	CVBS(BNC)×1
PC Signal	VGA(D-Sub)×1
Digital Signal	HDMI×1(1920×1080) , downward compatible
Audio Input	Audio Input x 1
Audio Output	Audio Output×1
<b>General</b>	
Power Consumption (Standard)	30W
Power Consumption (Maximum)	40W
Power Consumption (Standby)	≤1W
Power Supply	AC100-240V~(+/-10%), 50/60 Hz
Control Mode	Infrared remote control , Button control
Bezel Color	Black
Gross Weight	13.4kg
Unit Dimensions(mm)	546.0×60.0×360.0(Base excluded)
Active Screen area(mm)	476.64×268.11
Package Dimensions(mm)	630×220×490
Frame Depth (mm)	40.0
Enclosure material	Plastic
Installation Mode (all optional)	Base* , Wall-mounted* , TV-Wall*
Protective Glass/ Touch Screen	Optional
Working Temperature	0°C~50°C
Working Humidity	50%~80%
Stock Temperature	-20°C~60°C
Average Lifespan	50,000 hours
Features	Built-in industrial fan
	Built-in stereo speakers
	Spare DC 12V
	Control: Panel Keys / IR remote control
Note : *means optional fitting , remote control is optional	

### Dimensions(mm)

## DHL22

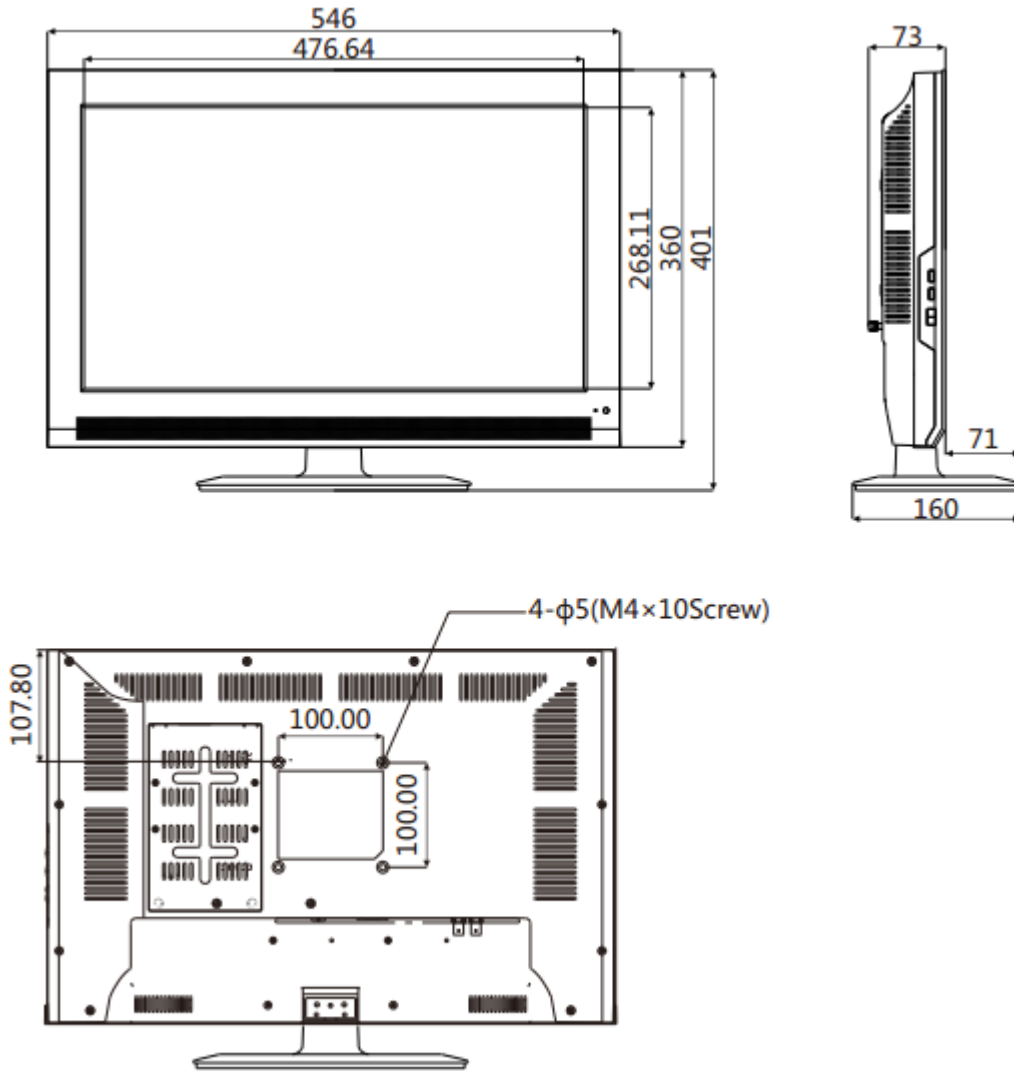

DHL22

**Dahua Technology Co., Ltd.**

1187BinAn Road, Binjiang District, Hangzhou, China

Tel: +86-571-87688883

Fax: +86-571-87688815

Email:overseas@dahuatech.com

www.dahuatech.com

\*Design and specifications are subject to change without notice.

© 2013Dahua Technology Co., Ltd.