



E-EFS-0501-60-60



6 Port Desktop Switch with 4 PoE Ports

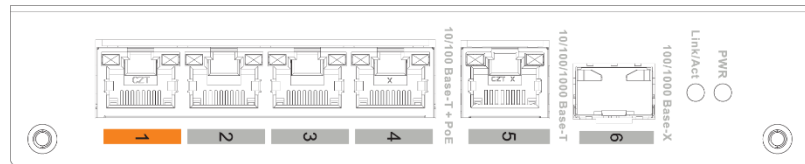

Panels

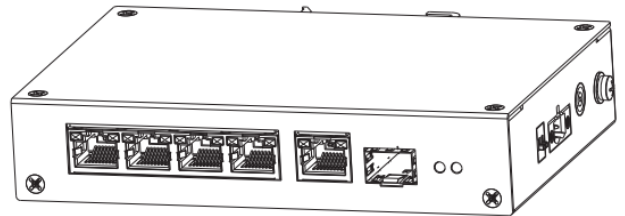

Dimensions mm (inch)

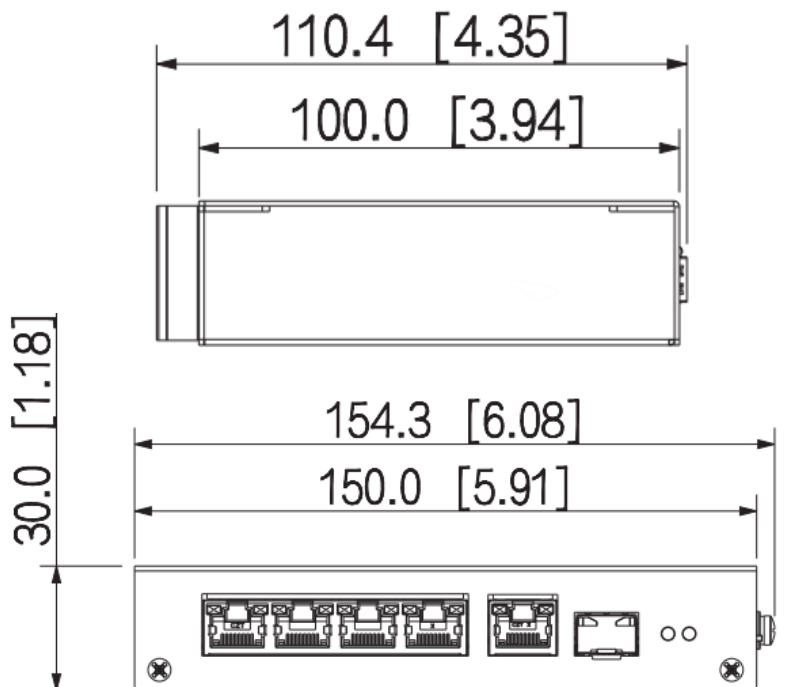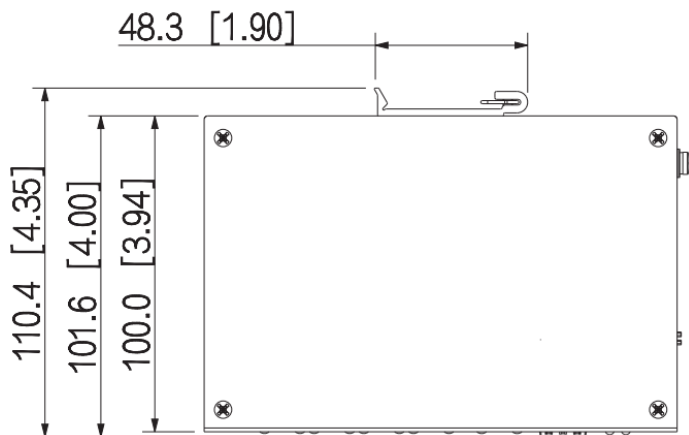

Technical Specification

Hardware

Ethernet Port	4
Optical Port	1
Ethernet Port Speed	100 Mbps
Data Transmission Port	Port 1–4: 4 × RJ-45 10/100 Mbps (PoE) Port 5: 1 × RJ-45 10/100/1000 Mbps (Uplink) Port 6: 1 × SFP 100/1000 Mbps (Uplink)
Power Supply	53 VDC
Operating Temperature	–30 °C to +65 °C
Operating Humidity	5% – 95% (RH)
Storage Temperature	–30 °C to +70 °C
Storage Humidity	5% – 95% (RH)
Power Consumption	Idling: 2,5 W Full load: 60 W

Performance

Capacity	6.80 Gbps
Packet Forwarding Rate	3.57 Mpps
Packet Buffer Memory	1 Mbit
MAC Table Size	8K
Communication Standard	IEEE802.3; IEEE802.3u; IEEE802.3X; IEEE 802.3ab; IEEE 802.3z

PoE

PoE Protocol	IEEE 802.3af; IEEE 802.3at; Hi-PoE
PoE Power	60 W
Power Consumption Management	Yes
PoE Pin Assignment	PoE/Hi-PoE: 1, 2, 4, 5 (V+), 3, 6, 7, 8 (V-
Long Distance PoE Transmission	250 m long distance PoE transmission

General

Statics Protection	Air discharge: 15 kV Contact discharge: 8 kV
Lighting Protection	Common mode: 4 kV Differential mode: 2 kV
Net Weight	0,45 kg
Gross Weight	1.10 kg
Product Dimensions	150 mm × 100 mm × 30 mm
Product Dimensions	Packing box: 270 mm × 240 mm × 75 mm (L × W × H) Protective box: 544 mm × 253 mm × 331 mm (L × W × H)