




A203C Product Show




Product model: A203C

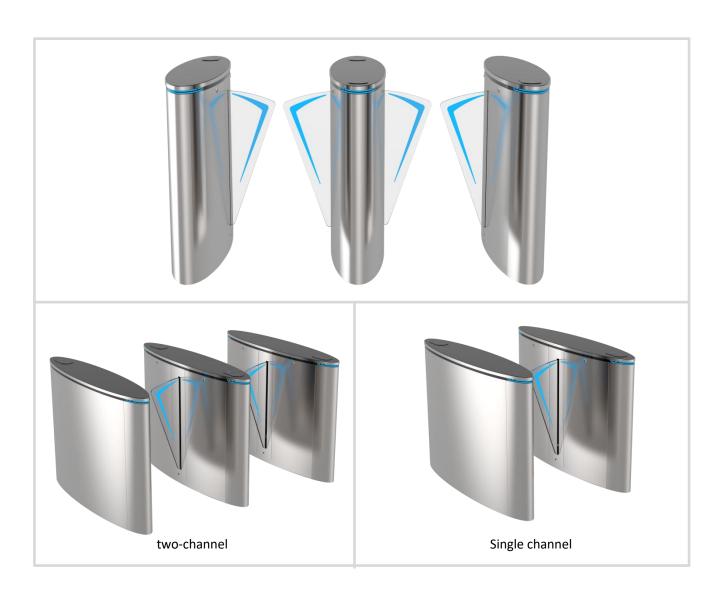



Functions & Features

- 1 Reasonable and reliable design, low noise, smooth operation and long service life;
- 2 With functions of anti-tail, anti-reverse pass and so on;
- 3 Card can be set "with memory" or "without memory" functions;
- 4. With automatic reset function, i.e. after having access to the gate, the gate automatically restores to the locked state if not pass within the time set;
- 5、With infrared anti-clip function (anti-clip when gate is open or running);
- 6. Compatible with IC, ID card, scanning and face recognition, etc.
- 7. Two modes of operation are available: open or closed.
- 8. Various working modes are available, including two-way card reading and one-way card reading,etc.

Product Size









Parame-

Size (L*W*H) 1400*3000*990mm

Pass width 550mm

Power 120W

Material Top T=2.0mm/ body T=1.5mm SUS304

Bar Material 15mm Clean Acrylic+RGB light

Movement Servo Flap Barrier Gate Movement

Infrared sensor 7 pairs

Indicator Light RGB light

Drive Unit Brushless servo 100W

Power Supply 24V 500W

Control Unit Servo control system

Communication Interface Dry contact/ RS485

Pass rate 35-50 persons/minute

Temperature -20°C∼+70°C

Humidity ≤90% No condensation

IP IP4X

Environment Indoor and outdoor (outdoor with canopy)

Product model: A203C



Case share

