




Z315 Product Show



Functions & Features

- 1、 Reasonable and reliable design, low noise, smooth operation and long service life;
- 2、 Card can be set "with memory" or "without memory" functions;
- 3、 With automatic reset function, i.e. after having access to the gate, the gate automatically restores to the locked state if not pass within the time set;
- 4、 With infrared anti-clip function (anti-clip when gate is open or running);
- 5、 Compatible with IC, ID card, scanning and face recognition,etc.
- 6、 Two modes of operation are available: open or closed.
- 7、 Various working modes are available, including two-way card reading and one-way card reading,etc.


Product Size

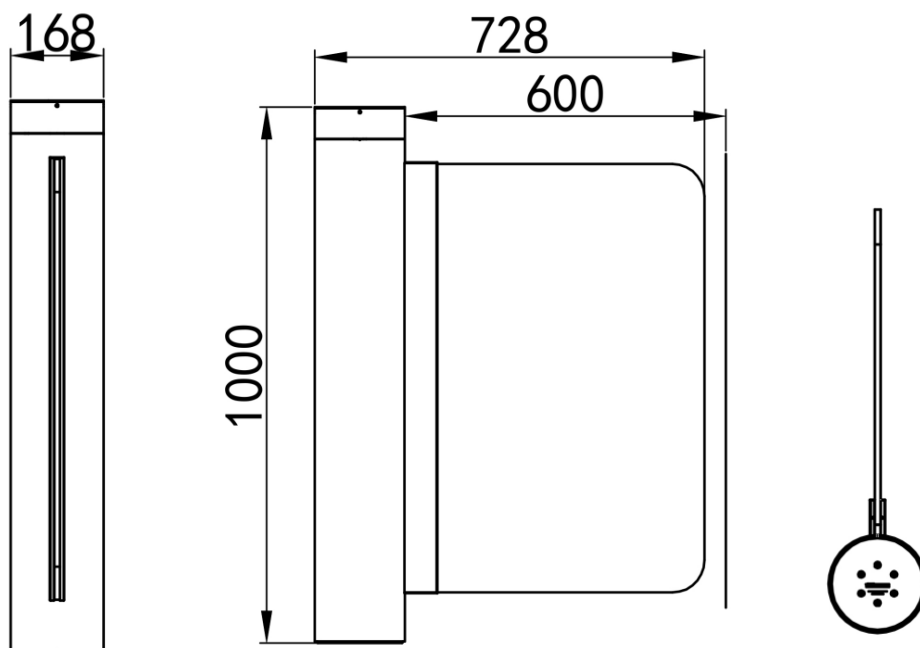

Parame-

Size (L*W*H)	168*168*1000mm
Pass width	600-900mm
Power	50W
Material	δ=2.2mm SUS304 Round tube
Bar Material	δ=10mm Clean Acrylic
Movement	Servo Swing Gate movement
Drive Unit	200W servo
Power Supply	24V 500W
Control Unit	Servo control system
Communication Interface	Dry contact & RS485
Pass rate	35-50 persons/minute
Temperature	-20°C~+70°C
Humidity	≤90% No condensation
IP	IP4X
Environment	Indoor and outdoor (outdoor with canopy)

Case share

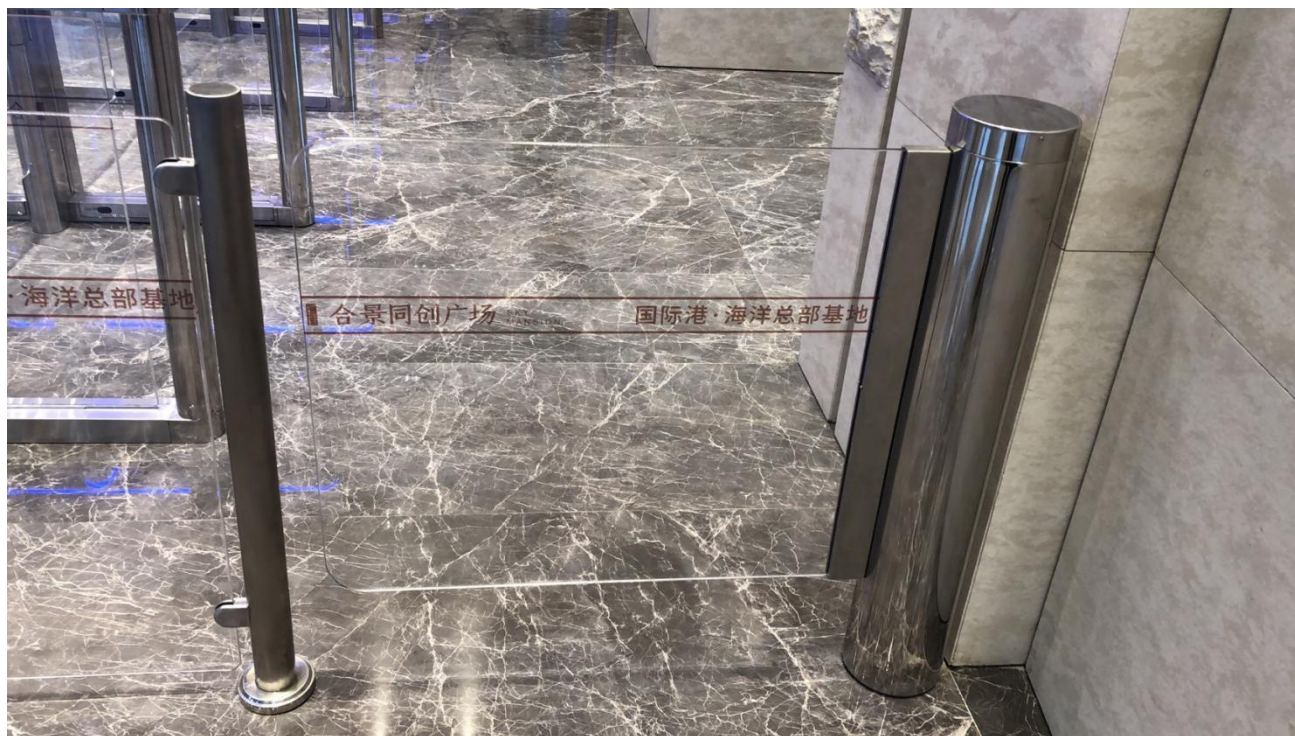

Turboo Automation Co., Ltd

**Scan our QR
code to follow**



official accounts



Telephone: 86-0755-23305213; 86-0755-29809981;



Head Address: 1st-4th Floor, Building #1, Guanjie Factory area, guanguang Road #1134, Guihua Community, Guanlan Street, Longhua District, Shenzhen;

Production base: Factory Building No.1, Zhongzhi Science and Technology Park, National High-tech Zone, Fuzhou City, Jiangxi;

Product model: Z315



FOR A SAFER WORLD.