


8C05SPSOL

Shielded Security & Intruder Alarm Cable– 24AWG, Solid BC, PVC Insulated, PVC Sheathed

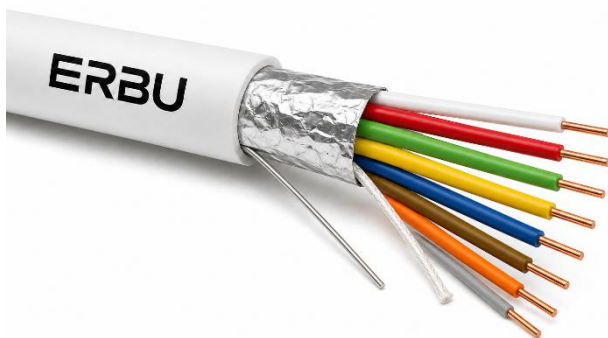

Applications:

For interconnect wiring in Security & Intruder alarm systems, inter-communications, remote control, and low-voltage/low-current signal transmission systems. (Low voltage cable, not for mains connection).

Technical Specification

Conductor Material	24AWG Solid BC, OFC
Max. Conductor DCR	93.8 Ω /km @ 20°C
Cable Length	100 / 300 m
Insulation Material	Colored PVC
Jacket Material	White PVC
Shielding	AL/PET foil (100% coverage) with 1/0.40mm TC drain wire
Rated Voltage	150V
Operating Temperature	-20 °C to +70 °C (PVC)
Insulation Color	White, Red, Green, Yellow, Blue, Brown, Orange, Gray
Conductor (N/mm $\pm$ 0.005)	1/0.50
Insulation Thickness	0.30 mm
Insulation Nom. OD	1.10 mm
Jacket Thickness	0.55 mm
Jacket Nom. OD	5.0 mm
Shielding	AL/pet foil