



E-ES-1000-60-M-60


10 Port Cloud Managed Desktop Switch with 8 PoE Ports

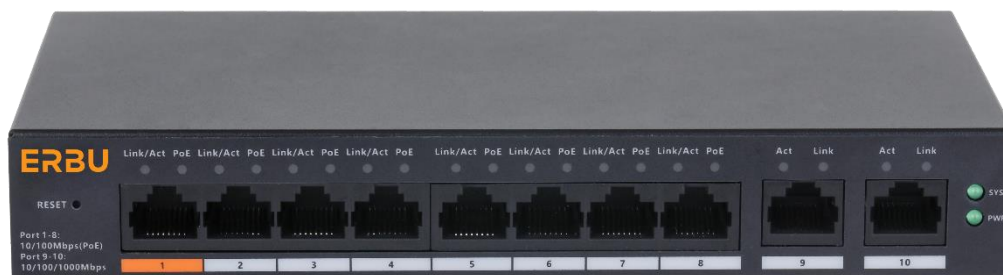


Dimensions mm (inch)

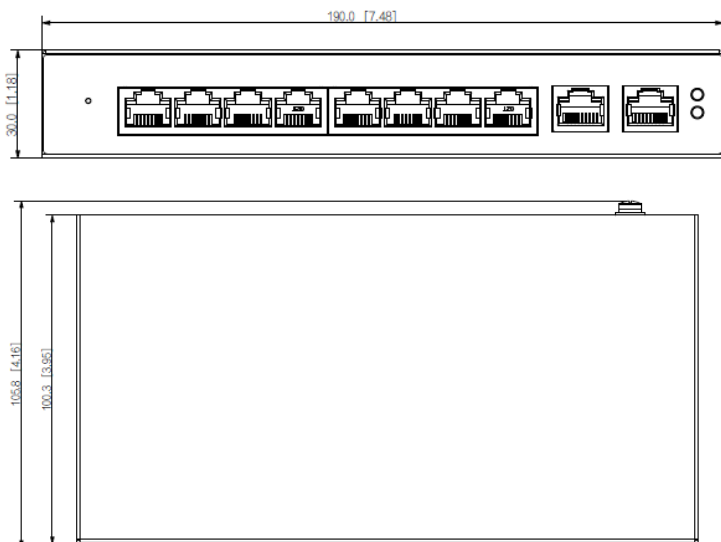

Installation

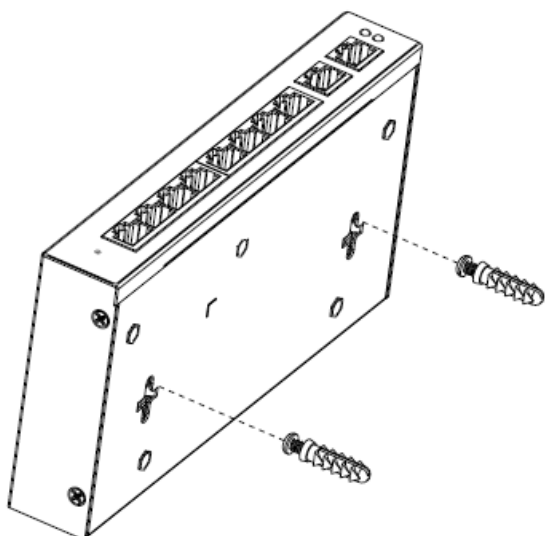

Panels

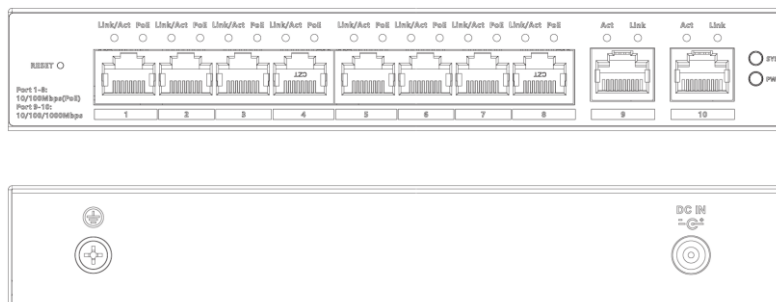

Technical Specification

Basic

Switching Capacity	4.8 Gbps
Packet Forwarding Rate	3.57 Mpps
Description of Function Slots	Port 1-8: 4 × RJ-45 10/100 Mbps (PoE); Port 9-10: 2 × RJ-45 10/100/1000 Mbps (uplink)
PoE Power	Port 1 ≤ 60 W, Port 2-8 ≤ 30 W, total ≤ 60 W
Layer	Layer 2
Operating Temperature	−10 °C to +55 °C
Operating Humidity	5% –95% (RH), non-condensing
Power Consumption	Idling: ≤3 W; Full load: 65 W
Power Supply	External power supply: 53 VDC, 1.226 A
Statics Protection	Air discharge: 8 kV; Contact discharge: 6 kV
Lightning Protection	Common mode: 4 kV; Differential mode: 2 kV
Net Weight	0.28 kg
Product Dimensions	130 mm × 90 mm × 26 mm (L × W × H)

Technical Specification

Hardware

PoE	Yes
Ethernet Port	8
Reset Button	1
Storage Temperature	–40 °C to +70 °C
Storage Humidity	5%–95% (RH), non-condensing

Performance

MTBF	232.62 years
Packet Buffer Size	4 Mbit
Jumbo Frame	9216 Byte
MAC Table Size	8K
VLAN Number	32
Communication Standard	IEEE802.3; IEEE802.3u; IEEE802.3x; IEEE802.3ab

Feature

PoE Protocol	IEEE802.3af; IEEE802.3at; Hi-PoE
PoE Power Consumption Management	Yes
PoE Pin Assignment	1,2,4,5 (V+) ,3,6,7,8 (V-)
Long Distance PoE Transmission	Yes
VLAN Function	Port-based VLAN
IEEE 802.3x Flow Control	Yes
DHCP Function	DHCP Client
Equipment Management	Web management; App management

General

Gross Weight	0.80 kg
Packaging Dimensions	265 mm × 238 mm × 76 mm
Casing Material	Sheet metal
Installation	Desktop mount; wall mount
Certifications	CE
Packing List	Quick Start Guide × 1; Legal and Regulatory Information × 1; Power adapter × 1; Power cord × 1