



ES-0600-60-60


6 Port Desktop Switch with 4 PoE Ports

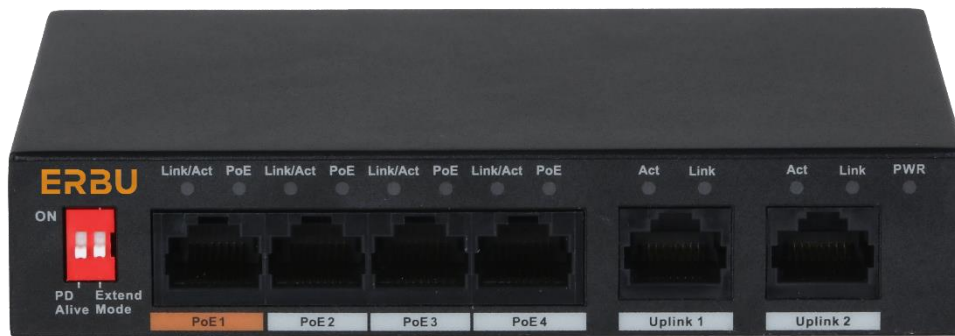

Dimensions mm (inch)

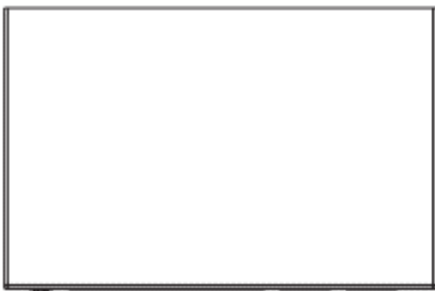

Panels

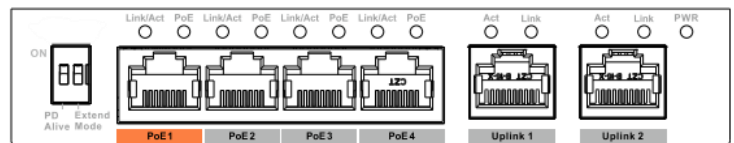

Technical Specification

Hardware

Ethernet Port	4
Optical Port	0
Ethernet Port Rate	100 Mbps
Number of Business Card Slots	Port 1–4: 4 × RJ-45 10/100 M (PoE) Port 5–6: 2 × RJ-45 10/100 M (uplink)
Power Supply	53V DC
Operating Temperature	−10°C to +55°C
Operating Humidity	5%–95%
Storage Temperature	−20°C to +70°C
Storage Humidity	5%–95%
Power Consumption	Idling: 1.5W Full load: 60W

SMD Plus by Camera

Switching Capacity	1.80 Gbps
Packet Forwarding Rate	0.89 Mpps
Packet Buffer Size	1 Mbit
MAC Table Size	2K
Communication Standard	IEEE802.3, IEEE802.3u, IEEE802.3x

Technical Specification**PoE**

PoE Standard	IEEE802.3af/IEEE802.3at/Hi-PoE
PoE Power	60W
PoE Power Consumption Management	Yes
PoE Pin Assignment	PoE/Hi-PoE: 1, 2, 4, 5 (V+), 3, 6, 7, 8 (V-)
Far Distance Mode	250 m @10 Mbps

General

ESD	Air discharge: 8kV Contact discharge: 6kV
Thunder proof	Common mode: 2kV Differential mode: 1kV
Net Weight	0.3 kg
Gross Weight	0.9 kg
Product Dimensions	130 mm × 85 mm × 26 mm
Packaging Dimension	267 mm × 239 mm × 77 mm