


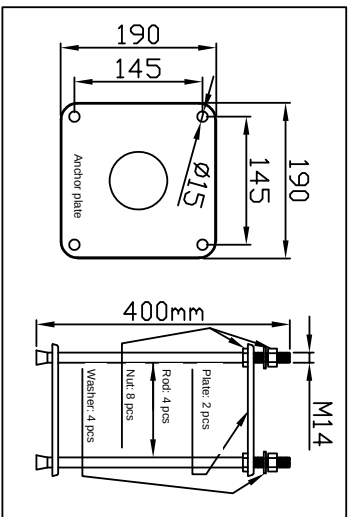

1000-2000	±1.2
400-1000	±0.8
120-400	±0.5
30-120	±0.3
6-30	±0.2
3-6	±0.1
0.5-3	±0.1
GB/T 1804-m	
Traced	
Trace check	

Camera pole 3 m

ERBU POLE 3M

Date

1. During assembly, part surfaces must be free of visible scratches, abrasions, deformation, cracks, stains and other visual defects.