


R-M-C32-RC4 EVO

ERBU 32" Full HD CCTV Monitor




- **24/7 Continuous Operation:** Industrial-grade components and stabilized power supply ensure reliable 24/7/365 performance.
- **4K Signal Support:** Accepts up to 4K @ 30Hz input signals for seamless compatibility with high-resolution NVRs.
- **Built-in Dual Speakers:** Integrated audio system for direct video playback without external speakers.

Dimensions mm

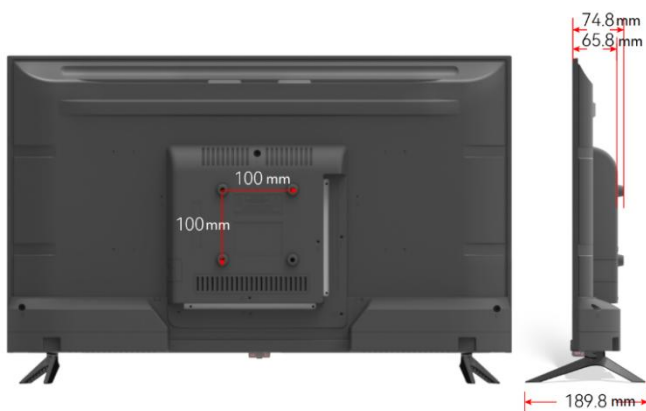

Interface Diagram

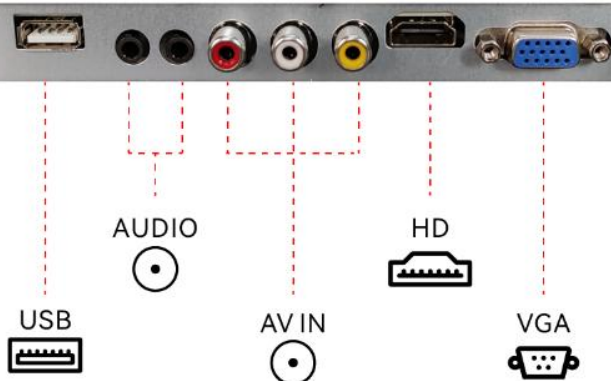

Technical Specification

Model

Model	R-M-C32-RC4 EVO
-------	-----------------

Display

Screen Size	32"
Aspect Ratio	16:9
Resolution	1920 × 1080 px
Max. Input Resolution	3840 × 2160 px @ 30 Hz
Backlight	LED
Brightness	350 cd/m²
Contrast	3000:1
Display Color	16,7M (8bit)
Viewing Angle	178°(H) / 178°(V)
Response Time	5 ms
Refresh Rate	50/60 Hz
Noise Reduction	3D NR
Lifespan	60 000 h

Interface

Input	1× HDMI, 1× VGA, 1× USB-A, 1× AV In (3× RCA: CVBS, Audio L/R), 1× Audio In (Jack 3,5 mm)
Output	1× Audio Out (Jack 3,5 mm)

Audio

Built-in Speaker	Yes, built-in dual speakers
------------------	-----------------------------

Structure

Control	Remote control / panel buttons (only supports power on/off)
Dimensions	721,9 × 74,8 × 425 mm
Package Dimensions	807 × 126 × 513 mm
Net Weight	3,5 kg
Gross Weight	5 kg
Full Box Weight	11,1 kg
Installation	Stand / Wall mount
Wall Mount	100 × 100 mm
Material	Metal backlight mixed with frame retardant virgin plastic
Color	Black

Power

Power Supply	110 – 230 V AC
Power Consumption	32 W; standby: ≤0,5W

Environment

Operating Temperature	-10 °C ~ +40 °C (±5 °C)
Operating Humidity	20% ~ 80% (no condensation)
Storage Temperature	-10 °C ~ +40 °C (±10 °C)
Storage Humidity	5% ~ 95% (no condensation)

Accessories

Package Contents	Stand, Power Supply, HDMI Cable, User Manual, Screws
------------------	--