


R-M-C43-RC4 EVO

ERBU 43" Full HD CCTV Monitor




- **24/7 Continuous Operation:** Industrial-grade components and stabilized power supply ensure reliable 24/7/365 performance.
- **4K Signal Support:** Accepts up to 4K @ 30Hz input signals for seamless compatibility with high-resolution NVRs.
- **Built-in Dual Speakers:** Integrated audio system for direct video playback without external speakers.

Dimensions mm

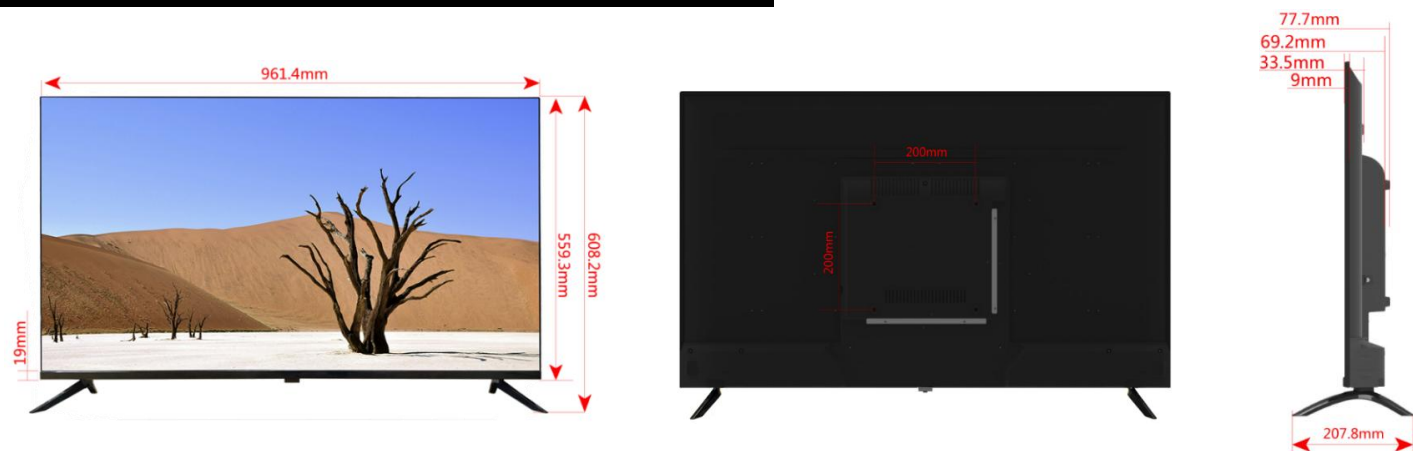

Interface Diagram

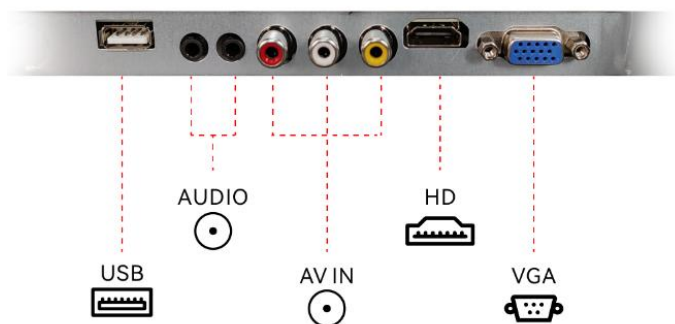

Technical Specification

Model

Model	R-M-C43-RC4 EVO
-------	-----------------

Display

Screen Size	43"
Aspect Ratio	16:9
Resolution	1920 × 1080 px
Max. Input Resolution	3840 × 2160 px @ 30 Hz
Backlight	LED
Brightness	350 cd/m²
Contrast	3000:1
Display Color	16,7M (8bit)
Viewing Angle	178°(H) / 178°(V)
Response Time	5 ms
Refresh Rate	60 Hz
Noise Reduction	3D NR
Lifespan	60 000 h

Interface

Input	1× HDMI, 1× VGA, 1× USB-A, 1× AV In (3× RCA: CVBS, Audio L/R), 1× Audio IN (jack 3,5 mm)
Output	1× Audio Out (jack 3,5 mm)

Audio

Built-in Speaker	Yes, built-in dual speakers
------------------	-----------------------------

Structure

Control	Remote control / panel buttons (only supports power on/off)
Dimensions	961,4 × 559,3 × 69,2 mm, excluding base height (47 mm)
Package Dimensions	1040 × 145 × 662 mm
Net Weight	6,5 kg
Gross Weight	8,3 kg
Full Box Weight	18,5 kg
VESA	200 × 200 mm
Material	Metal backlight mixed with frame retardant virgin plastic
Color	Black

Power

Power Supply	12 VDC, 5 A
Power Consumption	62 W; standby: ≤0,5W

Environment

Operating Temperature	-10 °C ~ +40 °C (±5 °C)
Operating Humidity	20% ~ 80% (no condensation)
Storage Temperature	-10 °C ~ +40 °C (±10 °C)
Storage Humidity	5% ~ 95% (no condensation)

Accessories

Package Contents	Stand, Power Supply, HDMI Cable, User Manual, Screws
------------------	--