

R-M-G55-RA EVO

ERBU 55" Ultra HD CCTV Monitor




- **24/7 Continuous Operation:** Industrial-grade components and stabilized power supply ensure reliable 24/7/365 performance.
- **4K Ultra HD Display:** Native 3840 x 2160 resolution delivers crystal-clear surveillance footage with maximum detail.
- **Built-in Dual Speakers:** Integrated audio system for direct video playback without external speakers.

Dimensions mm



Interface Diagram

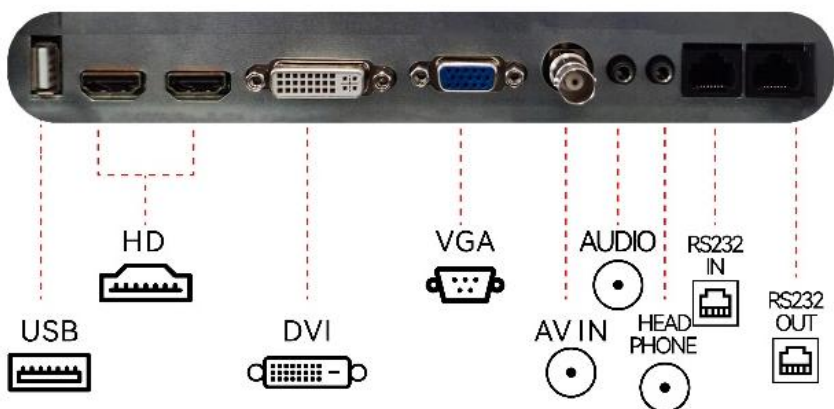

Technical Specification

Model

Model	R-M-G55-RA EVO
-------	----------------

Display

Screen Size	55"
Aspect Ratio	16:9
Resolution	3840 × 2160 px
Backlight	LED
Brightness	350 cd/m²
Contrast	5000:1
Display Color	1,07B (10bit)
Viewing Angle	178°(H) / 178°(V)
Response Time	6,5 ms
Refresh Rate	60 Hz
Noise Reduction	3D NR

Interface

Input	2× HDMI, 1× DVI, 1x VGA, 1× USB-A, 1× BNC (AV In), 1× RS-232 In (RJ-45), 1× Audio In (Jack 3,5 mm)
Output	1× RS-232 Out (RJ-45), 1× Audio Out (Jack 3,5 mm)

Audio

Built-in Speaker	Yes, built-in dual speakers
------------------	-----------------------------

Structure

Control	Remote control / panel buttons (only supports power on/off)
Dimensions	1229,9 × 709,6 × 66,66 mm; excluding base height (73 mm)
Package Dimensions	1420 × 810 × 165 mm
Net Weight	12,2 kg
Gross Weight	20,2 kg
Installation	Base / Wall Mount
Wall Mount	400 × 200 mm
Material	Metal backlight mixed with frame retardant virgin plastic
Color	Black

Power

Power Supply	12 VDC, 5 A
Power Consumption	120 W; standby: ≤0,5W

Environment

Operating Temperature	-10 °C ~ +40 °C (±5 °C)
Operating Humidity	20% ~ 80% (no condensation)
Storage Temperature	-10 °C ~ +40 °C (±10 °C)
Storage Humidity	5% ~ 95% (no condensation)

Accessories

Package Contents	Stand, Power Supply, HDMI Cable, User Manual, Screws
------------------	--