

ExSite Pro Bullet

Affordable security for hazardous sites

8 MP

Securing hazardous environments is a balancing act: safety is key, but cost-effectiveness is critical. Pelco's explosion-proof camera breaks this cycle, offering high-performance security and reliability without the price tag. Enjoy strong security without straining your budget.



Features

BUILT FOR YOUR HAZARDOUS SITE

Meet global explosion-proof and dust-ignition-proof compliance requirements. Built for tough environments, this camera can handle high/low temperatures, water, dust and strong winds.

STAY A STEP AHEAD OF THREATS

Smart Analytics offers better insights and faster responses with object detection and classification, crowd thresholds, vehicle type differentiation, crawling detection and privacy masking.

SAFEGUARD YOUR SECURITY SYSTEM

Get peace of mind that your system is secure with advanced cybersecurity features. Set up automatic firmware updates so your camera remains up-to-date with the latest security patches.

SEE WHAT YOU NEED TO SEE

This high-resolution camera captures sharp details, day and night. Its built-in IR illuminator provides clear night vision, so you can always see what's happening, even in the darkest areas.

EXPECT MORE FROM YOUR CAMERA

Unlock your camera's full potential by enabling Elevate, Pelco's built-in direct camera-to-cloud technology that enhances performance and detection accuracy.

COMPATIBLE WITH YOUR SYSTEM

This camera is ONVIF Profile S, G, T and M conformant for easy integration with leading video management systems, maximizing your existing investment.

PELCO®

Specifications

Image Performance

8.0 MP (4K Ultra HD)

| | | |
|---|--------------------|---|
| Max Resolution (H x V) and Aspect Ratio | Primary | (16:9) 3840 x 2160, 3328 x 1872, 3200 x 1800, 3072 x 1728 (4:3) 2880 x 2160, 2560 x 1920 |
| | Secondary | (16:9) 3840 x 2160*, 2560 x 1440, 1920 x 1080, 1280 x 720, 768 x 432, 640 x 360, 512 x 288 (4:3) 2880 x 2160*, 2560 x 1920, 2304 x 1728, 1920 x 1440, 1600 x 1200, 1280 x 960, 768 x 576, 640 x 480, 512 x 384 |
| | Tertiary | (16:9) 1920 x 1080 1280 x 720, 768 x 432, 640 x 360, 512 x 288, 384 x 216 (4:3) 1920 x 1440, 1600 x 1200, 1280 x 960, 800 x 600, 640 x 480, 512 x 384, 384 x 288, 368 x 264 |
| | Quaternary | (16:9) 1280 x 720, 768 x 432, 640 x 360, 512 x 288 (4:3) 1280 x 960, 640 x 480, 512 x 384, 384 x 288 |
| Dynamic Range | WDR Off | Up to 83 dB |
| | WDR On (IEC 62676) | Up to 130dB (dual exposure, 30 fps) |
| | WDR On | Up to 144 dB (dual exposure, 20 fps or less) |
| Max Image Rate ¹ | | (50 Hz/60 Hz): 25 fps/30 fps |
| Bandwidth Management | | Pelco Smart Compression technology; Idle scene mode |
| Signal-to-Noise Ratio(SNR) | | > 50 dB |

¹ Max Frame Rate of 15 fps when classified object privacy masking is enabled.

Lens and IR Illumination

4.4 - 9.3 mm

| | | |
|--|------|---|
| IR Illumination Max Distance ² (high power 850 nm LEDs) | | 70 m (229 ft), full tele 30 m (131 ft), full wide |
| Minimum Illumination | 8 MP | With IR: 0 lux in monochrome mode Without IR: 0.006 lux in monochrome mode; 0.02 lux in color mode |
| Horizontal Angle of View Based on Aspect Ratio | | (16:9) 47° – 109° (4:3) 35° – 78° |
| Vertical Angle of View Based on Aspect Ratio | | (16:9) 26° – 57° (4:3) 26° – 57° |
| Max Aperture | | F1.3 |
| Control | | Remote Zoom and Focus, Autofocus, IR Cut Filter |

² IR illumination power may be reduced at higher operating temperatures.

Image Control

| | |
|--------------------------|---|
| Image Compression Method | H.264, H.265, Motion JPEG, Pelco Smart Compression |
| Streaming | Multi-stream H.264, Multi-stream H.265, Motion JPEG |

Image Control

| | |
|----------------------------|---|
| Motion Detection | Pixel motion: Selectable sensitivity and threshold. Classified object detection |
| Camera Tamper Detection | Yes |
| Electronic Shutter Control | Automatic, Manual (1/7.5 to 1/15000 sec) |
| Iris Control | Automatic, Open, Closed, P-iris |
| Day/Night Control | Automatic, Manual, External |
| Flicker Control | 60 Hz, 50 Hz |
| White Balance | Automatic, Manual |
| Backlight Compensation | Adjustable |
| Image Rotation | 0°, 90°, 180°, 270° including Corridor Mode |
| Privacy Zones | Up to 64 zones |

Network

| | |
|-----------------------------|---|
| Network | 100BASE-TX, 1000BASE-T |
| Cabling | CAT5e |
| Connector | RJ-45 |
| ONVIF | ONVIF® compliance Profile S, Profile T, Profile M and Profile G (www.onvif.org) |
| Security | Password protection, HTTPS encryption, digest authentication, WS authentication, user access log, 802.1x port based authentication, FIPS 140-2 L1 (with optional camera license), onboard FIPS 140-2 L3 certified TPM, Secure Boot, Signed and encrypted firmware |
| Protocols | IPv6, IPv4, HTTP, HTTPS, SOAP, DNS, NTP, RTSP, RTCP, RTP, TCP, UDP, IGMPv3, ICMP, DHCP, Zeroconf, HSTS |
| Streaming Protocols | RTP/UDP, RTP/UDP multicast, RTP/RTSP/TCP, RTP/RTSP/HTTP/TCP, RTP/RTSP/HTTPS/TCP, HTTP, SRTP |
| Device Management Protocols | SNMP v2c, SNMP v3 |

Peripherals

| | |
|------------------------------|---|
| USB Port | USB 2.0 |
| Onboard Storage ³ | Two microSD/microSDHC/microSDXC slots – video speed class card required. Class V10 or better recommended. |

³ Tested maximum capacity is 1.5TB.

Auxiliary I/O

| | |
|--------------------------|--|
| Audio Compression Method | G.711 PCM 8 kHz, Opus |
| Audio Input/Output | Line level input and output |
| External I/O Terminals | 1 x Relay In, 1 x Relay Out, 1 x 12 VDC out at 50 mA |

Mechanical

| | | |
|--------------------|------------|--|
| Dimensions (LxWxH) | | 309 mm x 133 mm x 133 mm; 12.16" x 5.23" x 5.23" |
| Weight | Camera | 2.16 kg; 4.76 lbs |
| | Wall Plate | 0.15 kg; 0.33 lbs |
| Body | | Polycarbonate and aluminum |
| Sunshield | | Stainless steel |

Mechanical

| | |
|------------------|----------------------------------|
| Housing | Backbox Mount |
| Finish | Powdercoat grey, pantone 427C |
| Adjustment Range | Hinge +/- 90°, Rotation +/- 175° |

Electrical

| | | |
|-------------------------|-------------------|--|
| Power Consumption | | 25W Max |
| Power Source | PoE | IEEE 802.3af Class 3 |
| | PoE+ | IEEE 802.3at Class 4 |
| IR Illuminator Behavior | PoE | Above 60 °C (140 °F), IR will be disabled. Between -5 °C (23 °F) and 55 °C (131 °F), IR operates at 30% power. Below -20 °C (-4 °F), IR operates at 10% power. Hysteresis at 5 °C (9 °F). |
| | PoE+ or Aux Power | Above 60 °C (140 °F), IR will be disabled. Between 50 °C (122 °F) and 60 °C (140 °F), IR operates at 50% power. Below -20 °C (-4 °F), IR operates at 50% power. Hysteresis at 5 °C (9 °F). |
| External Power | | 12-24 VDC +/-10% |
| RTC Backup Battery | | 3V manganese lithium |
| Memory | | 4GB RAM, 4GB Flash |
| Redundant Power | | Seamless failover between PoE and Aux and back without interrupt in camera operation |

Environmental

| | |
|-----------------------|---------------------------------|
| Operating Temperature | -40°C to +65°C (-40°F to 149°F) |
| Startup Temperature | -40°C to +65°C (-40°F to 149°F) |
| Storage Temperature | -10°C to +70°C (14°F to 158°F) |
| Humidity | 0 - 100% non-condensing |

Certifications

| | |
|-------------------------------------|---|
| Certifications/Approvals | UL, cUL, CE, ROHS, UKCA, pending KC, BIS and RCM |
| Safety Standards | UL 62368-1, CSA 62368-1, IEC/EN 62368-1, IEC 62471 |
| Hazardous | ATEX (EN IEC 60079-0, EN 60079-7, EN 60079-31), IECEx (IEC 60079-0, IEC 60079-7, IEC 60079-31), UK Ex (EN IEC 60079-0, EN 60079-7, EN 60079-31), UL listed for USA (UL 60079-0, UL 60079-7, UL 60079-31, UL 121201), UL listed for Canada (CAN/CSA-C22.2 NO. 60079-0, CAN/CSA-C22.2 NO. 60079-7, CAN/CSA-C22.2 NO. 60079-31, CSA C22.2 NO. 213-17). UKCA, INMETRO, KCs, Ts mark pending |
| Environmental Standards/Ratings | IEC 60529 IP66, IP67, IP68 (1.8m depth for 2 hours), IPX9K, NEMA 4X, IEC 60068-2 Shock & Vibration, NEMA TS2 Sec 2.2.7-2.2.9, IK10-rated casing |
| Electromagnetic Emissions Standards | FCC Part 15 Subpart B Class A, ICES-003 Class A, EN 55032 Class B, EN 61000-6-4, EN 61000-3-2, EN 61000-3-3, EN 50121-4, EN 50130-4 |
| Electromagnetic Immunity Standards | EN 55035, EN 61000-6-2, EN 50121-4, EN 50130-4 |
| Warranty | Limited 5 Year Warranty ¹ |

¹ For more information on the warranty, see [Product Warranty Terms](#).

Explosion-Proof Certifications

| Part Number | Certification | Marking | Ambient Temperature | Cable Entry Temperature |
|-------------------|---|--|---------------------|-------------------------|
| EXFP1-8V9-EBT0-IR | UL 24 ATEX 3308X | Ex II 3G Ex ec IIC T4 Gc | -40°C ≤ Ta ≤ +65°C | +80°C |
| | UL 24 ATEX 3226X | Ex II 2D Ex tb IIIC T135°C Db | | |
| | IECEX ULD 24.0017X | Ex ec IIC T4 Gc Ex tb IIIC T135°C Db | | |
| | cULus File E319666 Hazardous Location America | Class I, Zone 2, AEx ec IIC T4 Gc Zone 21, AEx tb IIIC T135°C Db Class I Div 2 Group A, B, C, D T4 Class II Div 2 Group F, G T4 | | |
| | cULus File E319666 Hazardous Location Canada | Ex ec IIC T4 Gc X Ex tb IIIC T135°C Db X Class I Div 2 Group A, B, C, D T4 Class II Div 2 Group F, G T4 | | |

Analytics Specifications

Supported Analytics Events

| | |
|-------------------------------|--|
| Objects in Area | The event is triggered when the selected object type moves into the region of interest. |
| Object Loitering | The event is triggered when the selected object type moves into the region of interest and then stays for an extended amount of time. |
| Objects Crossing Beam | The event is triggered when the specified number of objects have crossed the directional beam that is configured over the camera's field of view. The beam can be unidirectional or bidirectional. |
| Object Appears or Enters Area | The event is triggered by each object that enters the region of interest. This event can be used to count objects. |
| Object Not Present in Area | The event is triggered when no objects are present in the region of interest. |
| Objects Enter Area | The event is triggered when the specified number of objects have entered the region of interest. |
| Objects Leave Area | The event is triggered when the specified number of objects have left the region of interest. |
| Object Stops in Area | The event is triggered when an object moves into a region of interest and then stops moving for the specified threshold time. |
| Direction Violated | The event is triggered when an object moves in the prohibited direction of travel. |
| Smart Motion Rule | Events are sent for person (including crawling) and vehicle present, against default unchangeable parameters. |
| Tamper Detection | The event is triggered when the scene unexpectedly changes. |
| Crowd Size | This event is triggered when the number of people is exceeded over a configurable duration. |
| Unusual Crowd Growth | This event is triggered when a crowd size grows unexpectedly. |
| Unusual Crowd Size | This event is triggered when an unusual crowd size is detected. |

Analytics capabilities, including detection range, may vary by camera line. Please consult the Pelco Smart Analytics Design Guide for details specific to the Sarix Enhanced 4 Series.

Supported Classified Object Types

| | |
|------------------------------|---|
| Object Types in Outdoor Mode | Vehicle, sub-types: Car, Pickup Truck, Large Truck, Van, Bicycle, Motorcycle, Bus Person |
| Object Types in Indoor Mode | Person |

Pelco Elevate Supported Features

| | |
|---------------------|--|
| Image Health | Detects incremental changes in the cameras view, such as position shifts or obstructions. Notifies users through ONVIF conformant events and summarized email reports. |
| Firmware Management | Schedule and deploy automatic firmware updates to multiple cameras, or update individual cameras on-demand. |

VideoXpert Supported Features

| | |
|----------------|--|
| 3.22 | Support for video analytic events without vehicle sub-classes. |
| 3.23 or higher | Support for crowd detection, audio analytics and video analytic events with vehicle sub-classes. |


Pelco Connect Supported Features

| | |
|-----------|--|
| Genetec | Support for Pelco Forensic Search and Analytics Configuration with the Genetec plugin. |
| Milestone | Support for Pelco Forensic Search and Analytics Configuration with the Milestone plugin. |


Outline Dimensions

Bullet Camera

| | |
|-------|--------|
| [X.X] | INCHES |
| X | MM |

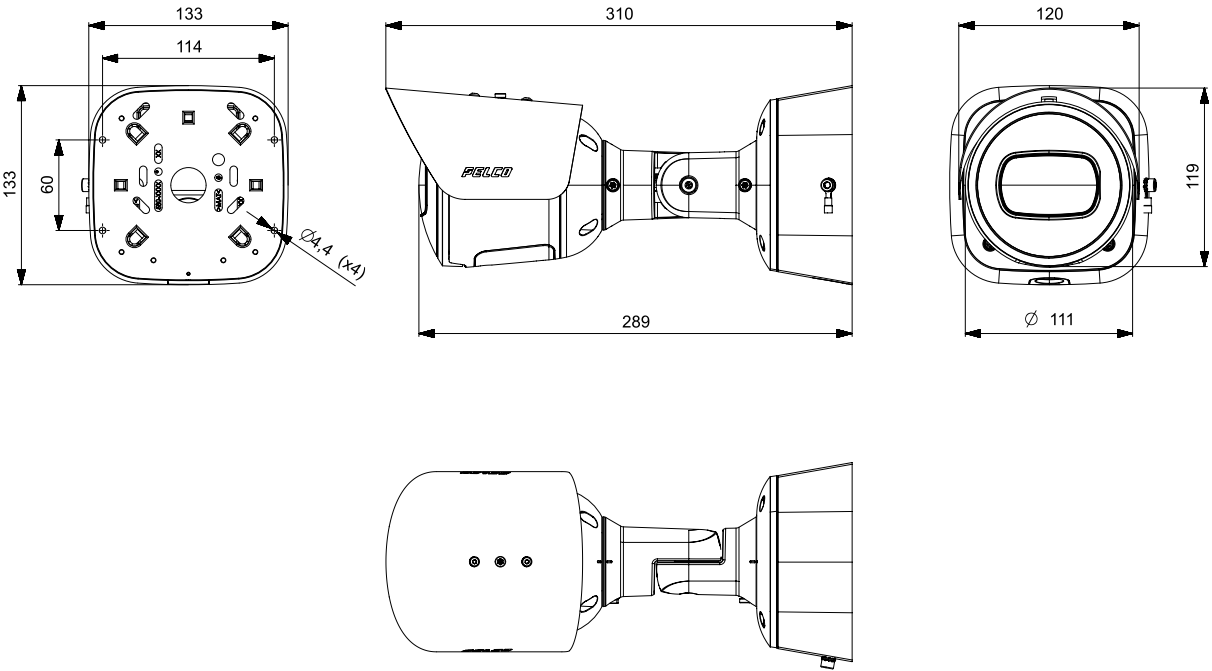

Junction Box

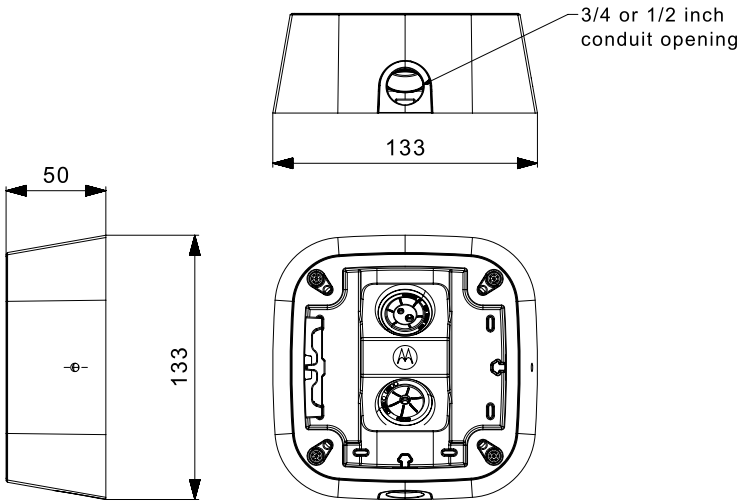

Ordering Information

Bullet Camera

| Model | MP | WDR | SureVision Technology | Lens | IR | Analytics | Smart Compression | Seamless Failover |
|-------------------|-----|-----|--------------------------|--------------|----|-----------|----------------------|----------------------|
| EXFP1-8V9-EBT0-IR | 8.0 | ✓ | ✓ | 4.4 - 9.3 mm | ✓ | ✓ | ✓ | ✓ |

Bullet Camera Accessories

| Model | |
|-----------------|--|
| CBLKIT-1011 | USB adapter cable, for use with USB-AC56 Wifi install kit ¹ |
| USB-AC56-NA-MSI | USB Wifi adapter install kit (North America) ¹ |
| USB-AC56-EU-MSI | USB Wifi adapter install kit (Europe) ¹ |
| PLMT-1001 | Pole mount adapter |
| CRNMT-1001 | Corner mount adapter |
| CAM-FIPS | Camera license to enable FIPS cryptographic module. |

¹ Must not be used in hazardous areas.

Support

Learn more and find additional documentation at pelco.com or email support@pelco.com for specific product support.