




2-wire colour Kit range.
Quadra external unit and new
Mini Handsfree and Maxi monitors.

 **Comelit**[®]
Passion. Technology. Design.



JOHN SMITH

«Comelit»

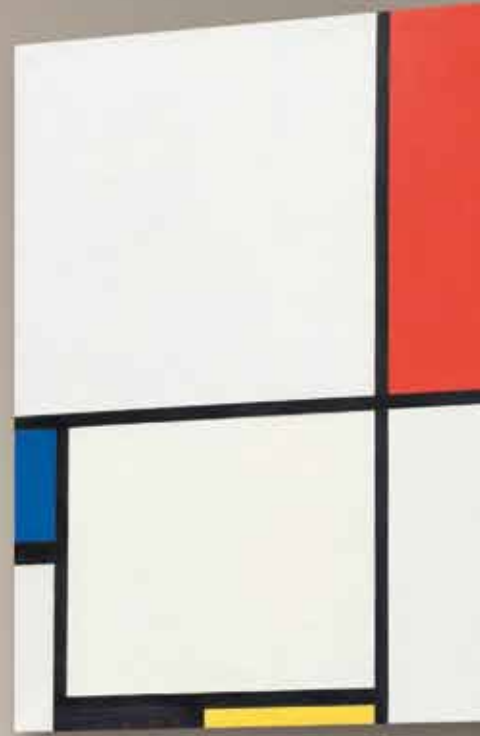

"Every true artist has been inspired more by the beauty of lines and color and the relationships between them than by the concrete subject of the picture."
Piet Mondrian.

Quadra kit:
the timeless
appeal of
essential
design.



Kits ② WIRES

QUADRA KIT WITH MINI HANDSFREE



8461V SINGLE-FAMILY KIT WITH QUADRA AND MINI HANDSFREE

Code	Quantity	Description
	8461V	
4893	1	2-WIRE VIDEO KIT QUADRA EXTERNAL UNIT
1209	1	2-WIRE VIDEO KIT POWER SUPPLY UNIT
6721W	1	MINI HANDSFREE COLOUR MONITOR. WHITE
1214/2C	1	VIDEO FILTER FOR SIMPLEBUS COLOUR SYSTEM
1216	1	VIDEO RISER TERMINATION FOR SIMPLEBUS

QUADRA KIT WITH MINI



8461M SINGLE-FAMILY KIT WITH QUADRA AND MINI COLOUR

Code	Quantity	Description
	8461M	
4893	1	2-WIRE VIDEO KIT QUADRA EXTERNAL UNIT
1209	1	2-WIRE VIDEO KIT POWER SUPPLY UNIT
6701W	1	MINI MONITOR WITH HANDSET, WHITE
1214/2C	1	VIDEO FILTER FOR SIMPLEBUS COLOUR SYSTEM
1216	1	VIDEO RISER TERMINATION FOR SIMPLEBUS

QUADRA KIT WITH ICONA



8461I SINGLE-FAMILY KIT WITH QUADRA AND ICONA

Code	Quantity	Description
	8461I	
4893	1	2-WIRE VIDEO KIT QUADRA EXTERNAL UNIT
1209	1	2-WIRE VIDEO KIT POWER SUPPLY UNIT
6601W	1	ICONA SERIES HANDS-FREE COLOUR MONITOR
6117	1	FLUSH BACKBOX FOR ICONA MONITOR
6620	1	WALL BRACKET FOR ICONA MONITOR
1214/2C	1	VIDEO FILTER FOR SIMPLEBUS COLOUR SYSTEM
1216	1	VIDEO RISER TERMINATION FOR SIMPLEBUS

QUADRA KIT WITH MAXI




8461X SINGLE-FAMILY KIT WITH QUADRA AND MAXI

Code	Quantity	Description
	8461X	
4893	1	2-WIRE VIDEO KIT QUADRA EXTERNAL UNIT
1209	1	2-WIRE VIDEO KIT POWER SUPPLY UNIT
6801W	1	7" MAXI SERIES MONITOR
6817	1	FLUSH BACKBOX FOR MAXI MONITOR
6820	1	WALL BRACKET FOR MAXI MONITOR
1214/2C	1	VIDEO FILTER FOR SIMPLEBUS COLOUR SYSTEM
1216	1	VIDEO RISER TERMINATION FOR SIMPLEBUS

External Units - Quadra

1 to 4 calls in a single product.

- Audio/video external unit
- Diecast aluminium cover
- Call buttons featuring exclusive "Sensitive Touch" technology
- Wall-mounted installation
- Dimensions 95x195x23 mm. Wall contact surface 90 mm
- Colour video camera with wide viewing angle
- IK08 protection rating
- 4 indicator LEDs for call sent, door open, audio active, system busy
- White LED for video playback illumination
- Nameplate holder in versions with 1/2/4 buttons
- High performance loudspeaker

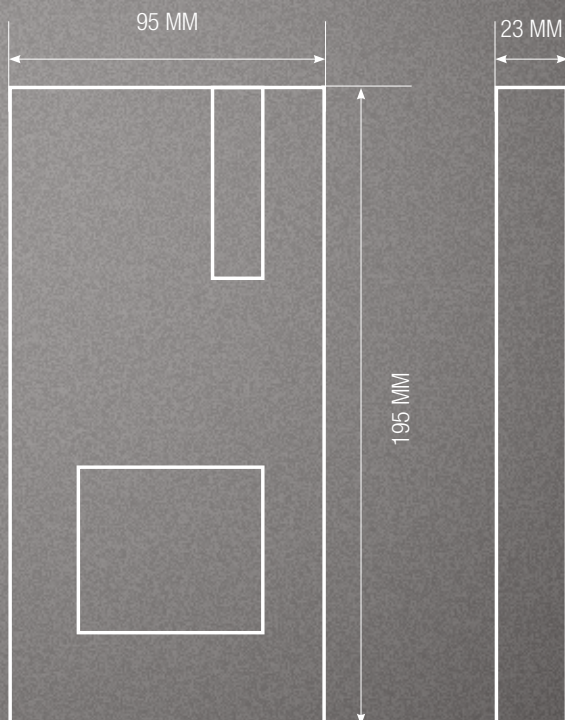

ICONS AND INDICATOR LEDS

CMOS COLOUR CAMERA



1 CALL

2 CALLS

4 CALLS



1235A

Software for printing nameplate labels, available to download free of charge from the Comelit website

Internal Units

Mini Handsfree



- Full-duplex hands-free door entry monitor with 16:9 4.3" colour display
- Commands with "Sensitive touch" technology and LED backlighting
- Wall-mounted and desk base installation
- Dimensions: 115x160x22 mm
- Contrast, brightness and ringtone volume adjustment and privacy control

Mini



- Full-duplex handset door entry monitor with 4.3" 16/9 B/W or colour display
- Commands with "Sensitive touch" technology and LED backlighting
- Wall-mounted and desk base installation
- Dimensions: 175x160x22 mm
- Contrast, brightness and ringtone volume adjustment and privacy control
- Available in White or Black

Internal Units

Icona




- Full-duplex hands-free door entry monitor with 4.3" 16/9 touch-screen colour display
- Commands with "Sensitive touch" technology, LED backlighting and "Swipe" technology
- Semi flush-mounted, wall-mounted and desk base installation
- Dimensions: 142x145.5x12 mm
- Contrast, brightness and ringtone volume adjustment and privacy control

Maxi



- Full-duplex hands-free door entry monitor with 7" touch-screen colour display
- Commands with "Sensitive touch" technology, LED backlighting and "Swipe" technology
- Semi flush-mounted, wall-mounted and desk base installation
- Dimensions: 223x124x12 mm
- Contrast, brightness and ringtone volume adjustment and privacy control


System and integration

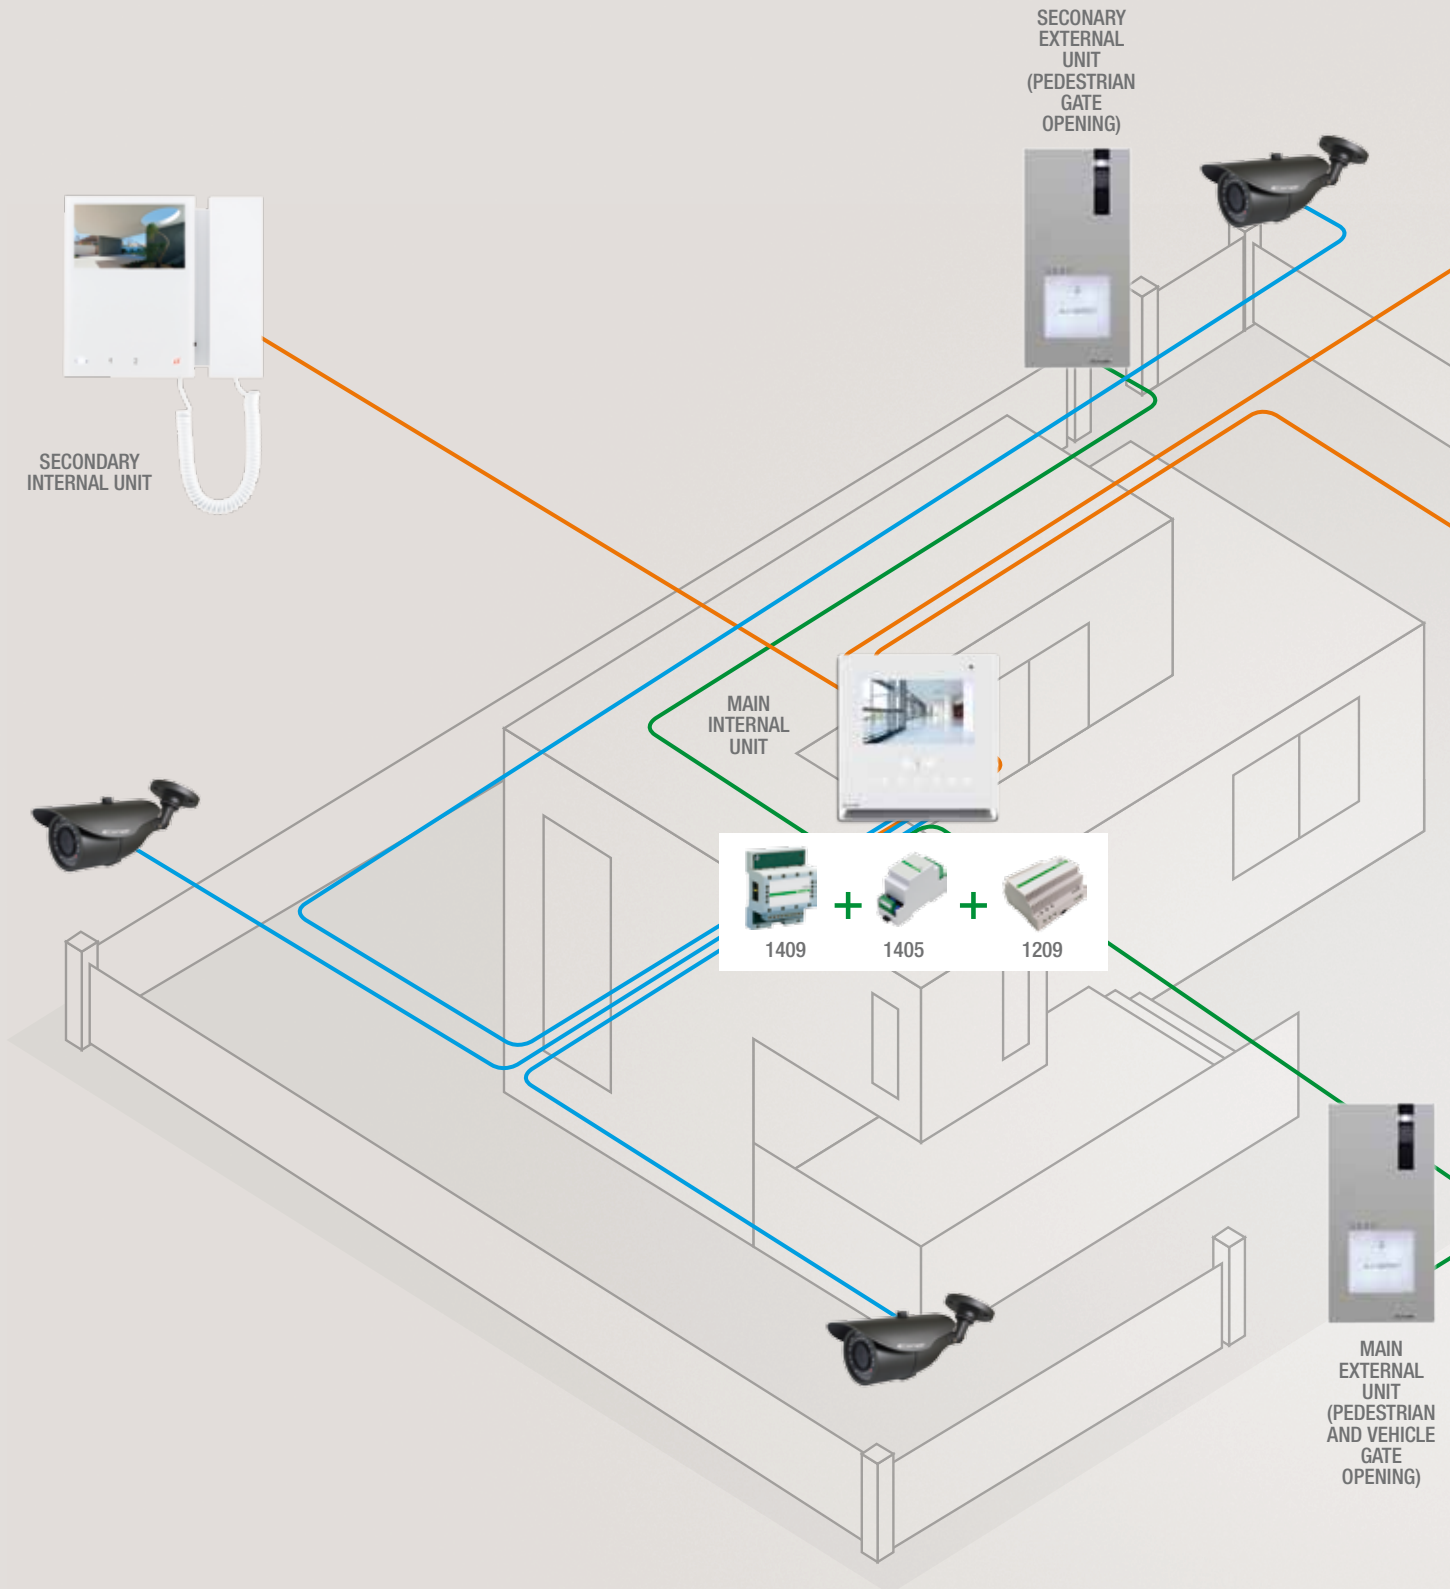

ADD ACCESSORY 1409 AND A CAMERA TO
CREATE AN EFFICIENT VIDEO SURVEILLANCE
SYSTEM.



SECONDARY
INTERNAL UNIT




ART .1409




SECONDARY
INTERNAL UNIT

Diagrams


SINGLE-FAMILY SYSTEM




TWO-FAMILY SYSTEM

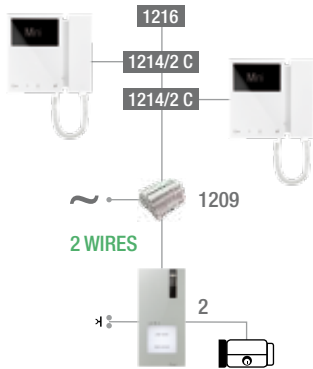


FOUR-FAMILY SYSTEM

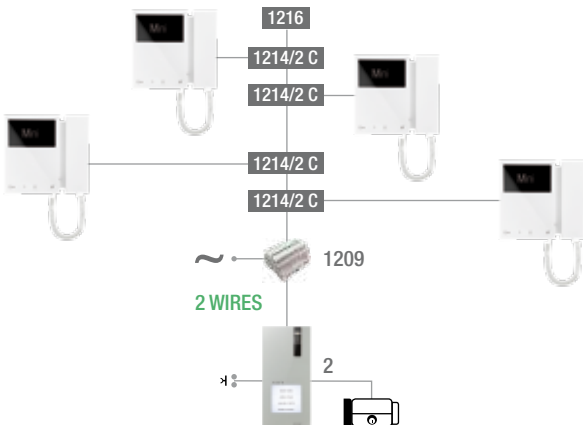


MAXIMUM INTERNAL UNIT EXTENSION

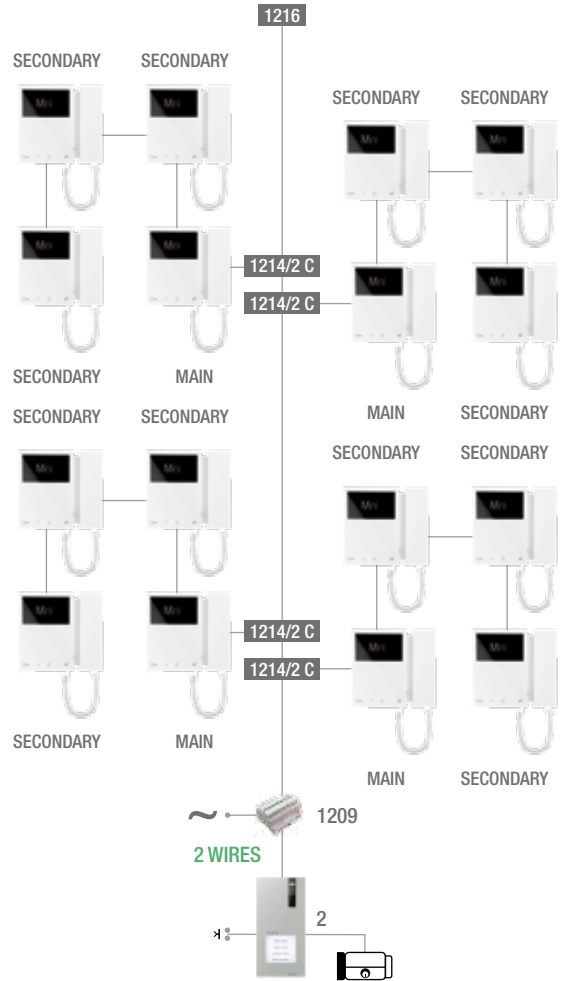


MANAGEMENT OF UP TO 3 CAMERAS

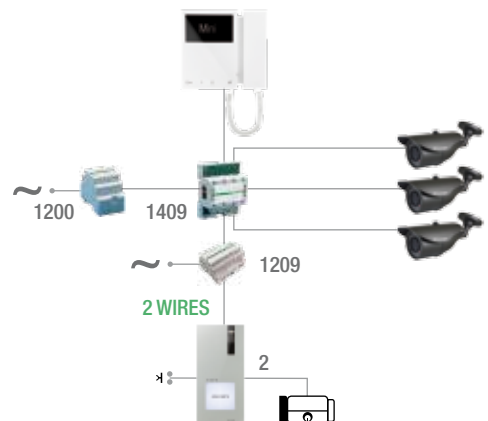


SYSTEM WITH 2 ENTRANCES

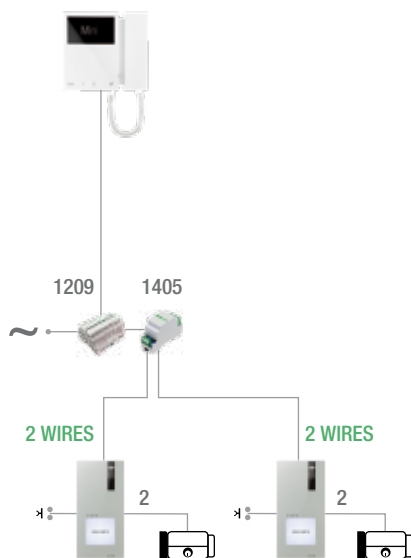

UP TO 4 INTERNAL MONITORS AND 4 ENTRANCE PANELS PER UNIT

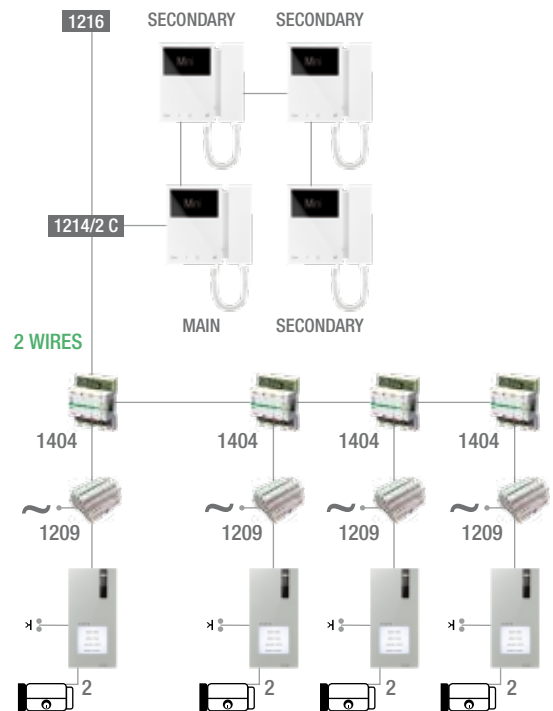

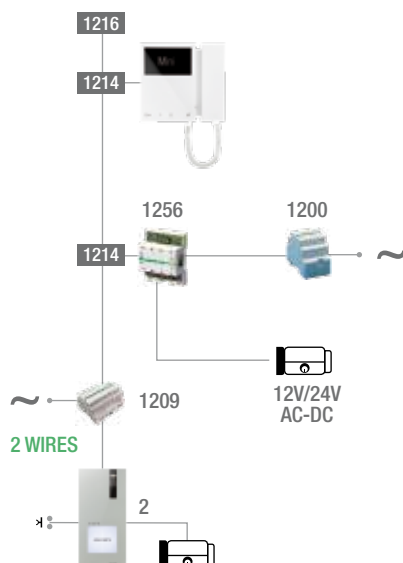

MANAGEMENT OF GENERAL LOADS: LIGHT AND ADDITIONAL DOOR LOCK







COMPATIBLE MONITORS WITH THE SYSTEM DIAGRAMS

- MINI 6701W 6700W
- MINI HANDSFREE 6721W
- ICONA 6601W
- MAXI 6801W




EXTERNAL UNITS

	4893	2-WIRE VIDEO KIT QUADRA EXTERNAL UNIT Quadra series wall-mounted external video entry unit. Die-cast aluminium faceplate, wide-angle colour camera and a single LED for nighttime lighting. Capacitive buttons with possibility to set from 1 to 4 call buttons using dip switches. Indicator LED for call sent, lock-release activated, audio activated and system busy. Adjustment of speaker volume and audio balance. Power supply from bus line. External unit dimensions: 95x195x23 mm.
	4793B	BLACK FACEPLATE FOR QUADRA ENTRANCE PANEL
	4793C	CORTEN FACEPLATE FOR QUADRA ENTRANCE PANEL

INTERNAL UNITS



	6721W	MINI COLOUR HANDS-FREE MONITOR. WHITE. SBTOP SYSTEM Wall-mounted monitor with 4.3" 16/9 colour screen and handset. Allows brightness and colour control, plus adjustment of the ringtone volume, which can be customised by choosing one of several different melodies. Equipped with 4 soft-touch buttons for lock-release, self-ignition, switchboard call and privacy function management as standard, and with door status indicator LED. Manages floor door calls as standard. Option of adding 4 additional buttons with accessory Art. 6733W. Complete with 2 x 8-position DIP-SWITCHES for user code programming and button programming. The wall-mounting or residential series box backplate and riser distribution terminal Art. 1214/2C are included. The monitor can only be used in 2-wire SimplebusTop Colour systems. Dimensions 175x160x22 mm.
	6701W	MINI MONITOR WITH HANDSET, WHITE. SBTOP SYSTEM Wall-mounted monitor with 4.3" 16/9 colour screen and handset. Allows brightness and colour control, plus adjustment of the volume of the ringtone, which can be customised with a choice of different melodies. Equipped as standard with 4 soft touch buttons for lock-release, self-ignition, switchboard call and privacy function and with door status indicator LEDs. Manages floor door calls as standard. Option of adding 4 additional buttons with accessory Art. 6733W. Complete with 2 x 8-position DIP-switches for user code programming and button programming. Includes wall-mounting or residential series box backplate and riser distribution terminal Art 1214/2C. The monitor can only be used in 2-wire SimplebusTop Color systems. Dimensions:175x160x22mm.
	6601W	ICONA SERIES HANDS-FREE COLOUR MONITOR. SBTOP SYSTEM Flush-mounted (in box Art. 6117) or wall-mounted (with bracket Art. 6620) colour monitor with 4.3" 16/9 screen, Full-Duplex hands-free audio and touch-sensitive controls. Allows adjustment of brightness level, contrast, audio volume and ringtone volume. Ringtones can be customised by selecting from the various melodies provided. Fitted as standard with a key button, enable/disable audio button with corresponding indicator LEDs and a further 7 programmable buttons for self-ignition, privacy service and other programmable functions. It is normally used for floor door call and call repetition management, and comes complete with 2 x 8-position DIP SWITCHES for user code programming and button programming. Equipped with riser distribution terminal Art. 1214/2C. The monitor can only be used in 2-wire SimplebusTop Colour systems. Dimensions 142.5x147x23 mm.
	6801W	7" MAXI SERIES MONITOR. SBTOP SYSTEM Colour monitor for flush-mounting (on Art. 6817) or wall-mounting (on support Art. 6820) with 7" 16/9 screen, hands-free full-duplex audio and touch sensitive controls. Allows brightness, contrast and audio volume control, plus adjustment of the volume of the ringtone, which can be customised with a choice of different melodies. Equipped as standard with control buttons for lock-release and audio enable/disable with relative indicator LEDs, plus 6 further buttons for self-ignition, privacy service and other programmable functions. Manages floor door calls and call repeat as standard. Complete with 2 x 8-position DIP-switches for user code programming and button programming. Equipped with riser distribution terminal Art 1214/2C. The monitor can only be used in 2-wire SimplebusTop Color systems. Dimensions: 223x124x25mm.

ACCESSORIES MINI




	6710	BACKPLATE AND DISTRIBUTION TERMINAL FOR MINI MONITOR Wall-mounting or residential series box backplate for MINI monitor, /BM versions with handset featuring magnetic induction for hearing aid wearers. Also includes riser distribution terminal Art. 1214/2C. Dimensions 145x100x4 mm.
	6711W	ADAPTER PLAQUE FOR MINI MONITOR W/ HANDSET. WHITE Mounting accessory for Mini Monitor when replacing Magis or Genius door entry monitors. White. Dimensions: 300x260x4 mm.
	6733W	ADDITIONAL BUTTONS KIT FOR MINI MONITOR, WHITE Accessory for transforming MINI monitors Art 6700W-/BM and 6701W-/BM into versions with 8 buttons. Includes an 8-button faceplate and an electronic module for activating the buttons, which can be installed quickly without opening up the monitor.

	6712	DESK BASE FOR MINI MONITOR Desk base converts the MINI monitor into a desktop version. Complete with 1 x 2 m labelled RJ45 cable for connecting the monitor terminals to the clasp or to a residential series jack. Dimensions: 145x190x120 mm.
---	------	---



ACCESSORIES MINI HANDSFREE

	6713W	ADAPTER PLATE FOR HANDSFREE MINI Mounting accessory for Handsfree Mini Monitor when replacing Magis or Genius door entry monitors. White.
	6732	DESK BASE FOR HANDSFREE MINI MONITOR Desk base for desktop conversion of Handsfree Mini monitor. Complete with 1x 2 metre cable with RJ45 connector to connect monitor terminals to the coupler or domestic series socket. Dimensions: 140x190x140mm







ACCESSORIES ICONA

	6117	ICONA FLUSH BACKBOX Flush mounted box for Planux, Smart and Icona monitors Dimensions: 132x132x50mm
	6620	WALL BRACKET FOR ICONA MONITOR Wall bracket for Icona monitor. Colour: White. Dimensions: 137X142X12.5 mm.
	6612	DESK BASE FOR ICONA MONITOR Adjustable tilt desk base converts the Icona monitor into a desktop version. Complete with 1 x 2 m labelled RJ45 cable for connecting the monitor terminals to the clasp or to a residential series jack. Dimensions: 145x190x120 mm.

ACCESSORIES MAXI

	6817	FLUSH-MOUNTED BOX FOR MAXI MONITOR Flush-mounted box in black ABS. Dimensions: 212x115x50mm
	6820	SBTOP & VIP MAXI MONITOR WALL SUPPORT Wall support for Maxi monitor. White. Dimensions: 216x117x16 mm.
	6812	DESK BASE FOR MAXI MONITOR

ACCESSORIES

	1209	2-WIRE VIDEO KIT POWER SUPPLY UNIT Power supply unit with overload and short circuit protection devices. It has two separate continuous outputs: 33vDC for external unit and 20V DC for the monitor power supply. Input voltage 120-230 VAC. Dimensions: 105x85x85 mm (6 DIN modules).
	1235A	NAMEPLATE LABEL PRINTING SOFTWARE
	1256	ACTUATOR RELAY Intelligent Simplebus device for controlling a 12-24 V relay contact. If used in mixed audio/video systems, the actuator relay needs a video filter to be purchased separately. Power supply: 12V AC or 20V DC. Dimensions: 66X85X35 (4 DIN modules).
	1404	DIGITAL SWITCHING DEVICE. 2-WIRE SYSTEM Audio/video switching module for Simplebus Top 2-wire digital systems. To be used in systems with more than one entrance. Power supply from bus line. Dimensions: 60x85x35 mm (4 DIN modules).
	1405	DIGITAL EXCHANGE FOR SYSTEMS WITH 2 INPUTS. 2-WIRE SYSTEM Audio/video switching module for Simplebus Top 2-wire digital systems. For use in systems with a maximum of 2 entrances with Quadra series external unit. Power supply from bus line. Dimensions: 35x90x58mm (2 DIN modules).
	1409	ACCESSORY FOR REMOTE COLOUR CAMERAS, 2-WIRE SYSTEM Remote camera module for Simplebus Top 2-wire digital systems. Allows management of up to 3 colour cameras in cyclical sequence from door entry monitors using a dedicated button. 12 Vac or 20 Vdc power supply. Dimensions: 60x85x35 mm (4 DIN modules).

8 023903 304756 | ccd: 2632000523

www.comelitgroup.com

